

MIDEA HEATING AND COOLING

MULTI SPLIT



Midea, established in 1968 is a public company listed and since July 2016 a Fortune 500 company offering one of the most comprehensive ranges in the home appliances industry. Midea specializes in air treatment (residential and commercial solutions), refrigeration, laundry, cooking appliances, small kitchen appliances, water appliances, floor care and lighting.

Since 1968, Midea has been making homes more comfortable, efficient, and inspiring standing along side millions of families around the world.

For over half a century, we have been part of everyday life, witnessing moments of joy, connection, and care in every corner of the home.

From pioneering smart technologies to creating solutions that balance quality, innovation, and value, Midea has continuously redefined what the "ideal" home can be.

Our purpose has always been simple: to be by your side, making each day just right, and turning your home into a place where life feels simply ideal.

Simply ideal

MD Appliances Pty Ltd

Founded in 2018, MD Appliances Pty Ltd is the official Australian distributor of Midea's air conditioning solutions for residential and commercial markets. Its mission is to deliver world-class cooling technology, energy efficiency, and superior comfort across Australia.

The company's vision is to become a leading HVAC company in the country, built on a professional team that combines experienced sales with agile operations and after-sales support.

With a long-term, efficiency-driven strategy and a culture of innovation, execution, and collaboration, MD Appliances has grown steadily since day one.

From deep on-site learning and capturing government energy rebates, to expanding contractor networks, opening brand stores, and scaling internal teams, MD Appliances has evolved into a mature and growing force in the Australian HVAC industry.

more than **$67.19B USD** of revenue in **2025**

serve customers in **200+** countries

40 global production centers

190K+ employees worldwide

global Fortune **246** company

7 years parts and labor warranty
For Hi-Wall/ Ducted/ Cassette/ VRF

5 years parts and labor warranty
For Window Box A/C

2 years parts and labor warranty
For Heavy Commercial Products

Local after sales service and support

*Source Euromonitor International (Shanghai) Limited; Consumer Appliances 25ed, retail volume sales in unit, 2024 data.


Our Technology:

THE EXCLUSIVE INVERTER QUATTRO™ TECHNOLOGY



A brain that calculates your needs in any conditions

Midea's Genius Core Energy Chip with Precise-control Inverter Deduction Algorithm reduces energy loss by enabling more precise signal reception, accurate data processing, and prompt delivery of instructions to the compressor. As a result, Midea's inverter compressor offers more stable operation than common inverters. It's super-smooth inverter frequency of variation ensures you never notice fluctuations in room temperature.

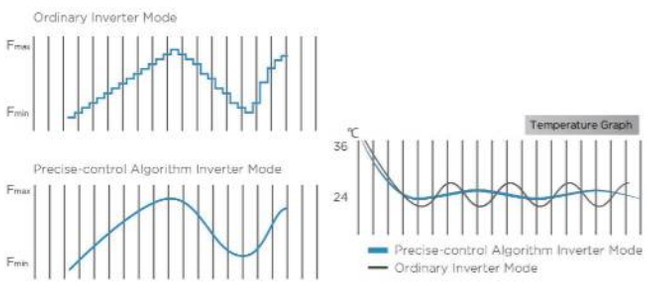

Up to **71%**
Ultra Energy Saving

65Hz in **6** seconds
Flash Cooling/Heating

Within
±0.5°C
Comfort With Stable Temperature

Superior operation from
60 to **-30°C**
High Ambient Cooling/Heating

FULL DC INVERTER SYSTEM

Thanks to the Full DC Inverter System, Midea's air conditioners achieved 20% higher **energy efficiency compared to** normal AC inverters.

On top of the Midea's Full DC Inverter System, the Genius Core is an intelligent commander that keeping the harmony internally and externally.




Sine-wave DC inverter control




Rear-earth magnet motor



IPM DC Fan Motor

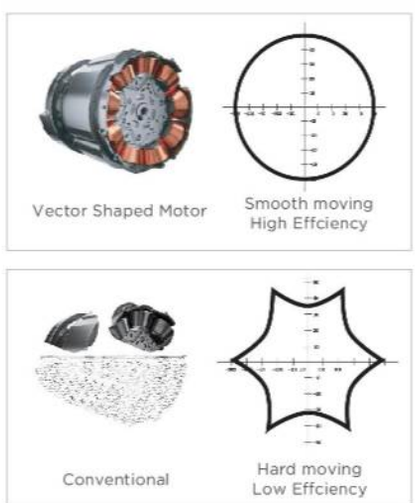

THE PERFECT MULTI ROOM SOLUTION

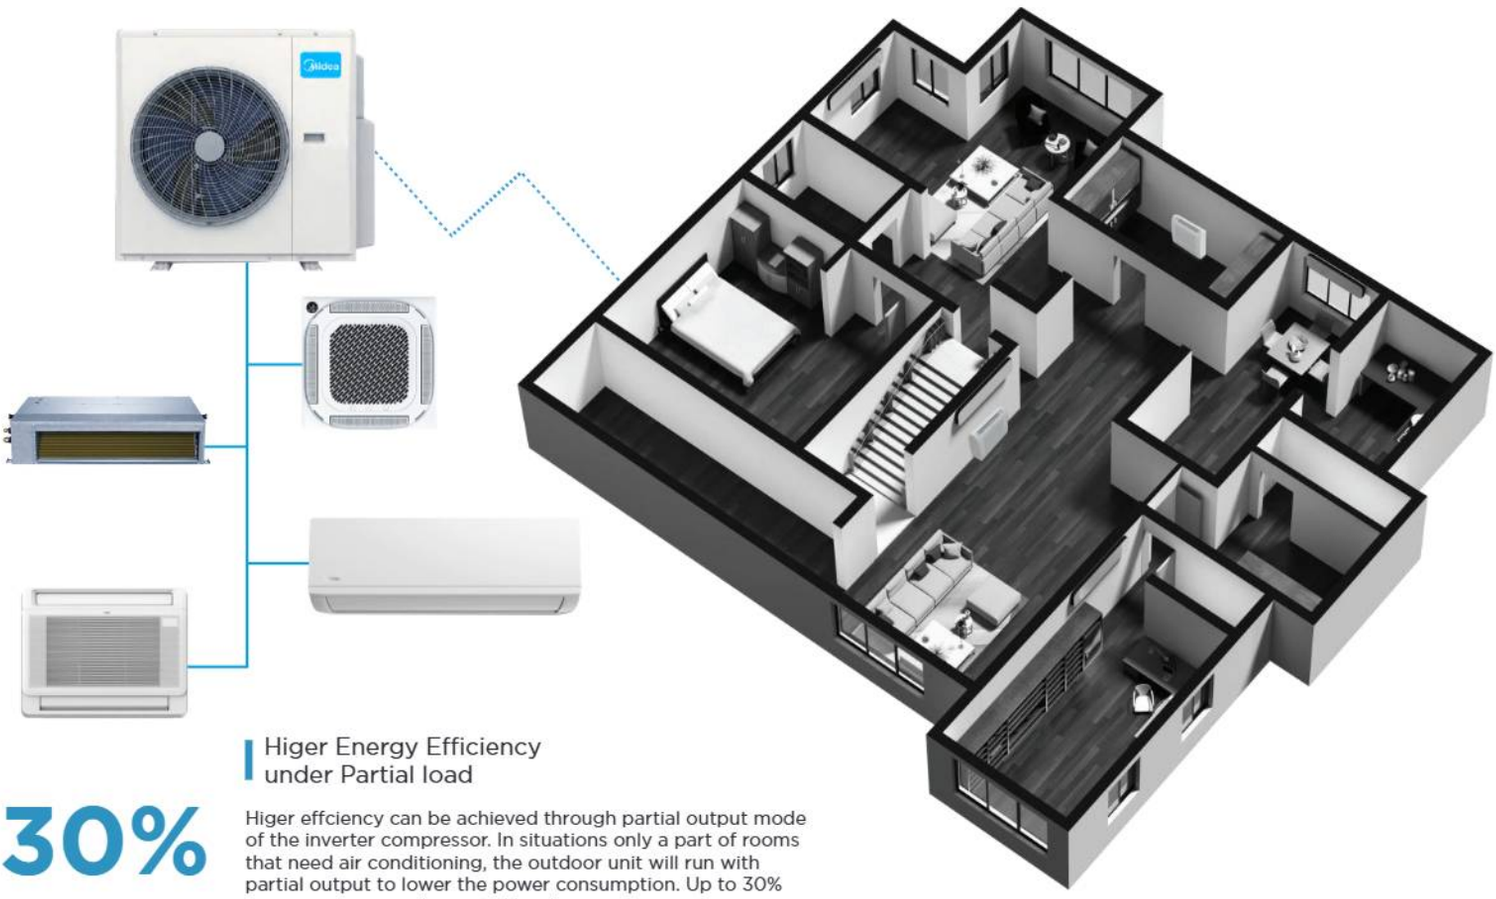


Higer Energy Efficiency under Partial load

30%

Higer effciency can be achieved through partial output mode of the inverter compressor. In situations only a part of rooms that need air conditioning, the outdoor unit will run with partial output to lower the power consumption. Up to 30% less energy use under partial load.

Bionic Blower Wheel and Improved Air Duct

Based on natural models and bionic principles, Midea's fan blade design can effectively reduce airflow resistance and noise. Together with the optimized air duct, it delivers the same air flow volume with 30% less energy consumption.

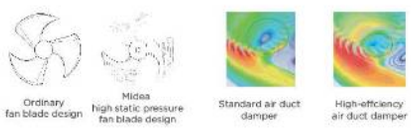

V-PAM (Vector + I-PAM) Inverter Control

V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology.With this technology, further miniaturization, higher efficiency, and better performance are attained.

Full DC Inverter Control



Twin-Rotary Compressor

The Twin-Rolling compressor system rotating with 180° symmetrical balance ensures low viration & noise due to the small torque

MULMI0371B, MULMI0480B, MULMI0513B, MULMI0618B

Inner Groove-Tube

A densely serrated shape has been applied to the copper to enlarge the heat exchange area. The latest heat exchanger has increased the tooth-count from 45 to 54, further improving the efficiency of heat transfer.

CUSTOMISE CHOICE

Midea Inverter Multi Split Systems provide 4 indoor unit types—Wall Mounted, Ducted, Compact Cassettes, and Floor Console—offering endless combination possibilities. Pair up to 6 indoor units with an outdoor unit featuring capacities from 5kW to 18kW. With this wide range of unit types and capacities, Midea delivers a system tailored to meet virtually any need.

Seamless & Sleek

Experience ultimate comfort with Midea's Wall Mounted Split Systems, designed for discreet yet powerful performance. The Turbo Function ensures rapid cooling and heating, while the optimized air tunnel design enhances airflow distribution. Control your system effortlessly from anywhere using the midea Mobile App via Wi-Fi, making it easy to adjust settings remotely.

Space-Saving Design

Ideal for tight spaces, Midea's Ducted and Cassette indoor units maximize efficiency without compromising style. The Ducted unit operates quietly, hidden within bulkheads or ceiling cavities for a seamless look. Meanwhile, the low-profile Inverter Cassette delivers 360° airflow, perfect for open-plan living areas.

Flexible & Functional

The Midea Floor Console ensures efficient heating and cooling with its dual-outlet design for fast temperature adjustments. Choose between wall-mounted or floor-standing installation to suit your space. Plus, enjoy convenient Wi-Fi control via the Android or Apple app, allowing remote temperature adjustments anytime, anywhere.




Wall Mounted Split System



Celling Ducted



Celling Mounted Compact Cassette



Floor Console

FLEXIBLE INSTALLATION



Midea Multi split system

Maximizing efficiency and comfort.

Midea's innovative multi-split system allows one outdoor unit to connect with up to 6 indoor units, each with independent control. This flexible setup not only saves space but also reduces energy costs by letting you heat or cool only the rooms you need.




Midea Single Split Systems

AUTOMATIC WIRING/PIPING CORRECTION

Midea multi-split unit helps the technicians to easily finish the wiring and piping. It saves great efforts by automatically correcting the connection and avoids any trial operations of every indoor unit after installation. The technicians press “check switch”, wait for few minutes and the machine will begin to operate as expected.



MULTI-SPLIT UNIT - THE RIGHT AIR SOLUTION FOR MULTIPLE SPACE

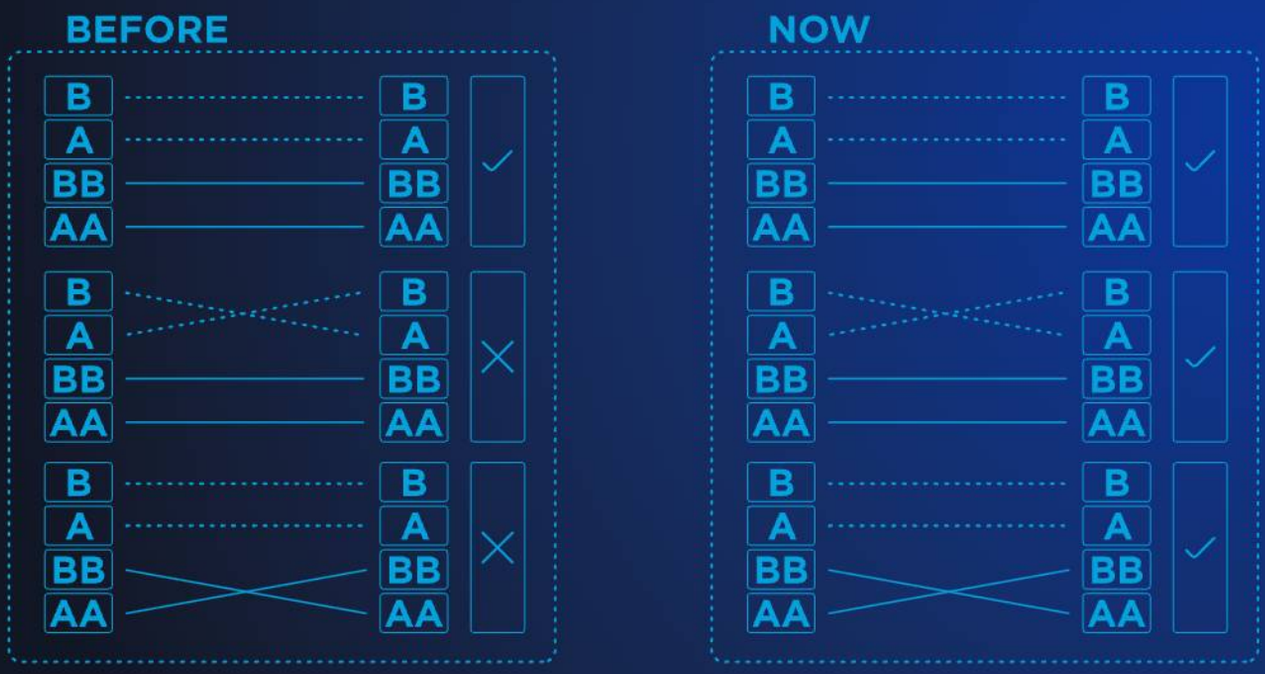

MULTI ODU



Multi ODU	Cooling Capacity (kW)	Heating Capacity (kW)	Max. IDU amounts
MULMI0250B	5.25 (0.9 - 5.7)	5.5 (1.9 - 5.7)	Up to 2 units
MULMI0371B	7.10 (3.22-8.79)	8.0 (2.05-8.79)	Up to 3 units
MULMI0490B	9.15 (2.73-10.55)	9.6 (2.87-10.55)	Up to 4 units
MULMI0513B	13.5 (2.63-14.65)	14.0 (2.63-15.24)	Up to 5 units
MULMI0619C	19.0 (5.39-19.63)	21.5 (3.9-22.57)	Up to 6 units
MULMI0620B	19.5(4.66-20.02)	24.5(7.56-24.50)	Up to 6 units

WIRELESS CONTROLLER FEATURE LIST



*** Comes in the box for all split systems.**
*** Optional for all cassettes and ducted systems. (To use a wireless controller, a ducted system will require a wired controler as a signal receiver.)**

Temperature range	16-30°C 62-86°F
Backlight	√
Press Button	√
ON/OFF	√
Mode	√
Temp Adjustment	√
Fanspeed	√
Turbo	√
Follow Me	√
Timer ON/OFF	√
Child Lock	√
Dry	√
Setting Temp Limit	√

MULTI SPLIT OUTDOOR

Model Number			MULMI0250B	MULMI0371B	MULMI0490B
	Power supply	Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (indoor+Outdoor)*	kW	5.25	7.1	9.15
	Power Input (indoor+Outdoor)	kW	1.3	1.95	2.35
	Rated current (Indoor+Outdoor)	A	6.81	8.68	10.6
	AEER (Indoor+Outdoor)*	W/W	3.94	3.57	3.81
	TCSPF (HOT/MIX/COLD)		6.514/5.609/5.737	5.977/5.169/5.302	6.503/5.578/5.756
Heating	Capacity (Indoor+Outdoor)*	kW	5.5	8.0	9.6
	Power input (indoor+Outdoor)*	kW	1.16	1.64	2.3
	Rated current (indoor+Outdoor)*	A	6.65	7.5	10.3
	ACOP (Indoor+Outdoor)	W/W	4.62	4.0	4.0
	HPSF (HOT/MIX/COLD)		5.094/4.658/4.022	5.086/4.712/4.333	5.181/4.518/3.915
	Max.current	A	12	17.5	19.0
Outdoor unit	Dimension(H*W*D)	mm	554x805x330	673x890x342	810x946x410
	Packing(H*W*D)	mm	615x915x370	750x1030x438	885x1090x500
	Net/Gross weight	Kg	34.6/37.7	48.1/51.6	61/66
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	20	30	40
Refrigerant piping	Liquid side		2 x Ø6.35(2x1/4in)	3 x Ø6.35(3x1/4in)	4 x Ø6.35(4x1/4in)
	Gas side		2 x Ø9.52(2x3/8in)	3 x Ø9.52(3x3/8in)	3xØ9.52+1xØ12.7(3x3/8in+1x1/2in)
	Max. length for all rooms	m	40	60	80
	Max.length for one indoor unit	m	25	30	35
	Min. length for one indoor unit	m	6	9	12
	Max. height difference(m)	OU to IU	15	15	15
		IU to IU	10	10	10

Model Number			MULMI0513B	MULMI0619C	MULMI0620B
	Power supply	Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (indoor+Outdoor)*	kW	13.5	19.0	19.5
	Power Input (indoor+Outdoor)	kW	3.73	5.58	5.86
	Rated current (Indoor+Outdoor)	A	17.8	24.1	26.0
	AEER (Indoor+Outdoor)*	W/W	3.56	3.42	3.28
	TCSPF (HOT/MIX/COLD)		5.959/5.304/5.53	5.774/5.221/5.503	5.594/5.059/5.314
Heating	Capacity (Indoor+Outdoor)*	kW	14.0	21.5	24.5
	Power input (indoor+Outdoor)*	kW	3.15	5.1	6.64
	Rated current (indoor+Outdoor)*	A	16.2	29.0	29.5
	ACOP (Indoor+Outdoor)	W/W	4.35	4.15	3.64
	HPSF (HOT/MIX/COLD)		5.545/4.8/4.312	5.372/4.509/3.748	5.124/4.238/3.609
	Max.current	A	30	30.4	38
Outdoor unit	Dimension(H*W*D)	mm	975x980x415	1333x952x415	1580x1054x510
	Packing(H*W*D)	mm	1080x1145x500	1480x1095x495	1740x1195x565
	Net/Gross weight	Kg	91/106.4	110.6/124.9	137.4/160.6
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	50	60	90
Refrigerant piping	Liquid side		5 x Ø6.35(5x1/4")	6 x Ø6.35(6x1/4in)	6 x Ø6.35 (1/4")
	Gas side		3x Ø9.52+ 2 x Ø12.7(3x3/8" + 2 x 1/2")	4 x Ø9.52+2x Ø12.7 (4x3/8in+2x1/2in)	4 x Ø9.52 + 2 x Ø12.7 (4 x 3/8" + 2 x 1/2")
	Max. length for all rooms	m	80	80	100
	Max.length for one indoor unit	m	35	35	35
	Min. length for one indoor unit	m	15	15	15
	Max. height difference(m)	OU to IU	15	15	15
		IU to IU	10	10	10

MULTI SPLIT HIGH WALLS



Venus

Model Number			MFAG20VB-N	MFAG26VB-N	MFAG35VB-N	MFAG50VB-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	2.05	2.5	3.5	5.0
Rated Heating	Capacity	kw	2.37	2.79	4.0	5.54
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	550/460/340/270/130	630/500/360/300/180	660/530/380/310/200	950/800/600/500/450
Indoor noise evel/ (Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	42.5/38/33/25/22	45.5/39/32/25/20	45/39.5/33/26/19.5	48.5/45.5/38/30.5/20
Indoor noise level(sound power)		dB(A)	52.9	57	59	60.5
Indoor unit	Dimenson(H*W*D)	mm	292×729x200	295x802x200	295x802×200	321×971x228
	Packing(H*W*D)	mm	375x790x270	380×875×285	380×875×285	405x1045×305
	Net/Gross weight	Kg	7.9/10.2	8.6/11.1	8.5/11.1	11/14.6
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /12.7mm(1/2in)

Model Number			MFAG60VB-N	MFAG70VB-N	MFAG80VB-N	MFAG90VB-N 0620 only
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	6.0	7.0	7.65	9.0
Rated Heating	Capacity	kw	6.5	7.5	8.2	9.5
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	950/800/600/500/450	1214/1053/683/504/492	1214/1053/683/504/492	1350/1110/760/560/350
Indoor noise evel/ (Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	48.5/45.5/38/30.5/20	52/50/41.5/27/21	52/50/41.5/27/21	54.5/52/45.5/34.5/22.5
Indoor noise level(sound power)		dB(A)	59.6	65.1	64.8	65.2
Indoor unit	Dimenson(H*W*D)	mm	321x971x228	337×1082×234	337×1082×234	362x1259x283
	Packing(H*W*D)	mm	405x1045x305	315×1155×415	315×1155×415	385x1340x450
	Net/Gross weight	Kg	11/14.6	13.2/17.1	13.2/17.1	19.0/24.7
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)	9.52mm(3/8in) /15.9mm(5/8in)

DUCTED CONNECTED



MULMID07C
MULMID09C
MULMID12C
MULMID18C
DUCMI70IC

Model Number			MULMID07C	MULMID09C	MULMID12C
Cooling	Capacity	kW	2.0	2.6	3.5
Heating	Capacity	kW	2.34	2.9	3.8
Indoor air flow		m^3/h	620/540/450	620/540/450	660/570/470
External Static	Rated	Pa	25	25	25
Pressure	Range	Pa	0-100	0-100	0-100
Indoor noise level (Hi/Mi/Lo)		dB(A)	35/33/31/27	35/33/31/27	35/33/31/26
Indoor unit	Dimension (H*W*D)	mm	200x700x450	200x700x450	200x700x450
	Packing (H*W*D)	mm	285x860x540	285x860x540	285x860x540
	Net / Gross weight	Kg	16.6/19.8	16.6/19.8	16.6/19.8
Design pressure		MPa	4.3/1.7	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	2xØ6.35 /2xØ9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")
Standard Thermostat type			Remote Control	Remote Control	Remote Control

Model Number			MULMID18C	DUCMI70IC
Cooling	Capacity	kW	5.28	7.3
Heating	Capacity	kW	6.0	7.5
Indoor air flow		m^3/h	900/780/650	1500/1300/1000
External Static	Rated	Pa	25	25
Pressure	Range	Pa	0-160	0-160
Indoor noise level (Hi/Mi/Lo)		dB(A)	36.5/34/31/25	38/36/33/28
Indoor unit	Dimension (H*W*D)	mm	245x700x750	245x1000x750
	Packing (H*W*D)	mm	298x925x850	304x1225x860
	Net / Gross weight	Kg	24.4/29	31.5/36.9
Design pressure		MPa	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø12.7(1/4"/1/2")	Ø9.52 / Ø15.9(3/8"/5/8")
Standard Thermostat type			Remote Control	Wire Control

COMPACT CASSETTE



MULMIC07C
MULMIC09C
MULMIC12C
MULMIC18C

Model Number			MULMIC07C	MULMIC09C	MULMIC12C	MULMIC18C
Cooling	Capacity	kW	**2.0**	**2.6**	3.5	5.3
Heating	Capacity	kW	**2.3**	**2.9**	3.5	5.5
Indoor air flow		m^3/h	500/460/400	500/460/400	620/520/330	660/540/300
Indoor noise level (Hi/Mi/Lo)		dB(A)	41.0/37.5/34.5	37.0/35.5/33.0	42/38.5/31.5	44/41/31.5
Indoor unit	Dimension (H*W*D)	mm	245x570x570	245x570x570	245 x570x570	245x570x570
	Packing (H*W*D)	mm	295x715x640	295x715x640	295x715x640	295x715x640
	Net / Gross weight	Kg	16.1/18.8	16.1/18.8	16.1/18.8	16.2/19
Design pressure		MPa	4.2/1.5	4.2/1.5	4.2/1.5	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	2xØ6.35 / 2x Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø12.7(1/4"/1/2")
Standard Thermostat type			Remote control	Remote control	Remote control	Remote control

FLOOR CONSOLE



MFCS50VA-N

Model Number			MFCS50VA-N
Power supply		Ph-V-Hz	220-240V-1Ph-50Hz
Rated Cooling	Capacity	kW	**4.7**
Rated Heating	Capacity	kW	**5.2**
Indoor air flow (Turbo/Hi/Mi/Lo/Silence)		**L/s**	**255/229/202/176**
Indoor noise level / (Turbo/Hi/Mi/Lo/Silence) (sound pressure)		dB(A)	**42/39/29/25**
Indoor unit	Dimension (H*W*D)	mm	**621x794x200**
	Packing (H*W*D)	mm	**719x865x280**
	Net / Gross weight	Kg	**14.9/18.8**
Refrigerant piping	Liquid side / Gas side	mm(inch)	6.35mm(1/4") / 12.7mm(1/2")
Operation temperature		℃	**16-30**
Room temperature	**Indoor(cooling/heating)**	℃	**16-32/0-30**
	Outdoor(cooling/heating)	℃	**0-50/-30-24**

INDOOR UNITS COMBINATION

DEFAULT RATIO

Model	MULMI0250B	MULMI0371B	MULMI0490B	MULMI0513B	MULMI0619C	MULMI0620B
Ratio	182%	183%	178%	149%	141%	159%

INDOOR UNITS COMBINATION MULMI0250B

One Unit (kW)	Two Unit (kW)			
3.5	2.0+2.0	2.0+5.0	2.6+3.5	3.5+3.5
5.3	2.0+2.6	2.0+6.0	2.6+5.0	3.5+5.0
/	2.0+3.5	2.6+2.6	2.6+6.0	3.5+6.0

INDOOR UNITS COMBINATION MULMI0371B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)		
5.0	2.0+2.0	2.6+2.6	3.5+3.5	2.0+2.0+2.0	2.0+2.6+5.0	2.6+3.5+5.0
6.0	2.0+2.6	2.6+3.5	3.5+5.0	2.0+2.0+2.6	2.0+2.6+6.0	2.6+3.5+6.0
/	2.0+3.5	2.6+5.0	3.5+6.0	2.0+2.0+3.5	2.6+2.6+2.6	3.5+3.5+3.5
/	2.0+5.0	2.6+6.0	/	2.0+2.0+5.0	2.6+2.6+3.5	3.5+3.5+5.0
/	2.0+6.0	/	/	2.0+2.0+6.0	2.6+2.6+5.0	3.5+3.5+6.0
/	/	/	/	2.0+2.6+2.6	2.6+2.6+6.0	/
/	/	/	/	2.0+2.6+3.5	2.6+3.5+3.5	/

INDOOR UNITS COMBINATION MULMI0490B

One Unit (kW)	Two Unit (kW)				Three Unit (kW)				
7.0	2.0+2.0	2.6+2.6	3.5+3.5	5.0+5.0	2.0+2.0+2.0	2.0+2.6+2.6	2.0+3.5+5.0	2.6+3.5+5.0	/
8.0	2.0+2.6	2.6+3.5	3.5+5.0	5.0+6.0	2.0+2.0+2.6	2.0+2.6+3.5	2.0+3.5+6.0	2.6+3.5+6.0	/
/	2.0+3.5	2.6+5.0	3.5+6.0	6.0+6.0	2.0+2.0+3.5	2.0+2.6+5.0	2.6+2.6+2.6	3.5+3.5+3.5	/
/	2.0+5.0	2.6+6.0	3.5+7.0	/	2.0+2.0+5.0	2.0+2.6+6.0	2.6+2.6+3.5	3.5+3.5+5.0	/
/	2.0+6.0	2.6+7.0	3.5+8.0	/	2.0+2.0+6.0	2.0+2.6+7.0	2.6+2.6+5.0	3.5+3.5+6.0	/
/	2.0+7.0	2.6+8.0	/	/	2.0+2.0+7.0	2.0+2.6+8.0	2.6+2.6+6.0	/	/
/	2.0+8.0	/	/	/	2.0+2.0+8.0	2.0+3.5+3.5	2.6+3.5+3.5	/	/

Four Unit (kW)				
2.0+2.0+2.0+2.0	2.0+2.0+2.6+2.6	2.0+2.6+2.6+2.6	2.0+3.5+3.5+3.5	2.6+2.6+3.5+3.5
2.0+2.0+2.0+2.6	2.0+2.0+2.6+3.5	2.0+2.6+2.6+3.5	2.0+3.5+3.5+5.0	2.6+2.6+3.5+5.0
2.0+2.0+2.0+3.5	2.0+2.0+2.6+5.0	2.0+2.6+2.6+5.0	2.0+3.5+3.5+6.0	2.6+2.6+3.5+6.0
2.0+2.0+2.0+5.0	2.0+2.0+2.6+6.0	2.0+2.6+2.6+6.0	2.6+2.6+2.6+2.6	2.6+3.5+3.5+3.5
2.0+2.0+2.0+6.0	2.0+2.0+3.5+3.5	2.0+2.6+3.5+3.5	2.6+2.6+2.6+3.5	3.5+3.5+3.5+3.5
2.0+2.0+2.0+7.0	2.0+2.0+3.5+5.0	2.0+2.6+3.5+5.0	2.6+2.6+2.6+5.0	/
2.0+2.0+2.0+8.0	2.0+2.0+3.5+6.0	2.0+2.6+3.5+6.0	2.6+2.6+2.6+6.0	/

INDOOR UNITS COMBINATION MULMI0513B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)				
7.0	2.0+5.0	3.5+3.5	5.0+5.0	2.0+2.0+3.5	2.0+2.6+6.0	2.0+5.0+5.0	2.6+2.6+8.0	2.6+6.0+6.0
8.0	2.0+6.0	3.5+5.0	5.0+6.0	2.0+2.0+5.0	2.0+2.6+7.0	2.0+5.0+6.0	2.6+3.5+3.5	3.5+3.5+3.5
/	2.0+7.0	3.5+6.0	5.0+7.0	2.0+2.0+6.0	2.0+2.6+8.0	2.0+6.0+6.0	2.6+3.5+5.0	3.5+3.5+5.0
/	2.0+8.0	3.5+7.0	5.0+8.0	2.0+2.0+7.0	2.0+3.5+3.5	2.6+2.6+2.6	2.6+3.5+6.0	3.5+3.5+6.0
/	2.6+5.0	3.5+8.0	6.0+6.0	2.0+2.0+8.0	2.0+3.5+5.0	2.6+2.6+3.5	2.6+3.5+7.0	3.5+3.5+7.0
/	2.6+6.0	/	6.0+7.0	2.0+2.6+2.6	2.0+3.5+6.0	2.6+2.6+5.0	2.6+3.5+8.0	3.5+3.5+8.0
/	2.6+7.0	/	6.0+8.0	2.0+2.6+3.5	2.0+3.5+7.0	2.6+2.6+6.0	2.6+5.0+5.0	3.5+5.0+5.0
/	2.6+8.0	/	/	2.0+2.6+5.0	2.0+3.5+8.0	2.6+2.6+7.0	2.6+5.0+6.0	3.5+5.0+6.0
/	/	/	/	/	/	/	/	3.5+6.0+6.0

Four Unit (kW)						
2.0+2.0+2.0+2.0	2.0+2.0+2.6+5.0	2.0+2.0+5.0+5.0	2.0+2.6+3.5+5.0	2.0+2.6+5.0+5.0	2.6+2.6+5.0+6.0	3.5+3.5+3.5+7.0
2.0+2.0+2.0+2.6	2.0+2.0+2.6+6.0	2.0+2.0+5.0+6.0	2.0+2.6+3.5+6.0	2.0+2.6+5.0+6.0	2.6+3.5+3.5+3.5	3.5+3.5+3.5+8.0
2.0+2.0+2.0+3.5	2.0+2.0+2.6+7.0	2.0+2.6+2.6+2.6	2.0+2.6+3.5+7.0	2.6+2.6+2.6+8.0	2.6+3.5+3.5+5.0	2.0+3.5+3.5+3.5
2.0+2.0+2.0+5.0	2.0+2.0+2.6+8.0	2.0+2.6+2.6+3.5	2.6+2.6+2.6+2.6	2.6+2.6+3.5+3.5	2.6+3.5+3.5+6.0	2.0+3.5+3.5+5.0
2.0+2.0+2.0+6.0	2.0+2.0+3.5+3.5	2.0+2.6+2.6+5.0	2.6+2.6+2.6+3.5	2.6+2.6+3.5+5.0	2.6+3.5+3.5+7.0	2.0+3.5+3.5+6.0
2.0+2.0+2.0+7.0	2.0+2.0+3.5+5.0	2.0+2.6+2.6+6.0	2.6+2.6+2.6+5.0	2.6+2.6+3.5+6.0	2.6+3.5+3.5+8.0	2.0+3.5+3.5+7.0
2.0+2.0+2.0+8.0	2.0+2.0+3.5+6.0	2.0+2.6+2.6+7.0	2.6+2.6+2.6+6.0	2.6+2.6+3.5+7.0	3.5+3.5+3.5+3.5	2.0+3.5+3.5+8.0
2.0+2.0+2.6+2.6	2.0+2.0+3.5+7.0	2.0+2.6+2.6+8.0	2.6+2.6+2.6+7.0	2.6+2.6+3.5+8.0	3.5+3.5+3.5+5.0	2.0+3.5+5.0+5.0
2.0+2.0+2.6+3.5	2.0+2.0+3.5+8.0	2.0+2.6+3.5+3.5	2.0+2.6+3.5+8.0	2.6+2.6+5.0+5.0	3.5+3.5+3.5+6.0	2.0+3.5+5.0+6.0

Five Unit (kW)				
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+3.5+3.5
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.6+3.5+3.5	2.0+2.0+3.5+3.5+5.0
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.6+3.5+5.0	2.0+2.0+3.5+3.5+6.0
2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.6+3.5+6.0	2.0+2.0+3.5+3.5+7.0
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.6+3.5+7.0	2.0+2.0+3.5+3.5+8.0
2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.6+3.5+8.0	2.0+2.0+3.5+5.0+5.0
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.6+2.6+5.0	2.0+2.0+2.6+5.0+5.0	2.0+2.0+3.5+5.0+6.0
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.6+5.0+6.0	2.0+2.0+3.5+6.0+6.0
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.6+2.6+7.0	2.0+2.0+2.6+6.0+6.0	2.0+2.6+2.6+2.6+2.6

Five Unit (kW)			
2.0+2.6+2.6+2.6+3.5	2.0+2.6+2.6+6.0+6.0	2.6+2.6+2.6+2.6+2.6	2.6+2.6+2.6+5.0+6.0
2.0+2.6+2.6+2.6+5.0	2.0+2.6+3.5+3.5+3.5	2.6+2.6+2.6+2.6+3.5	2.6+2.6+2.6+6.0+6.0
2.0+2.6+2.6+2.6+6.0	2.0+2.6+3.5+3.5+5.0	2.6+2.6+2.6+2.6+5.0	2.6+2.6+3.5+3.5+3.5
2.0+2.6+2.6+2.6+7.0	2.0+2.6+3.5+3.5+6.0	2.6+2.6+2.6+2.6+6.0	2.6+2.6+3.5+3.5+5.0
2.0+2.6+2.6+2.6+8.0	2.0+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+7.0	2.6+2.6+3.5+3.5+6.0
2.0+2.6+2.6+3.5+3.5	2.0+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+8.0	2.6+3.5+3.5+3.5+3.5
2.0+2.6+2.6+3.5+5.0	2.0+2.6+3.5+5.0+5.0	2.6+2.6+2.6+3.5+3.5	2.6+3.5+3.5+3.5+5.0
2.0+2.6+2.6+3.5+6.0	2.0+2.6+3.5+5.0+6.0	2.6+2.6+2.6+3.5+5.0	2.6+3.5+3.5+3.5+6.0
2.0+2.6+2.6+3.5+7.0	2.0+2.6+3.5+6.0+6.0	2.6+2.6+2.6+3.5+6.0	3.5+3.5+3.5+3.5+3.5
2.0+2.6+2.6+3.5+8.0	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+7.0	/
2.0+2.6+2.6+5.0+5.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+8.0	/
2.0+2.6+2.6+5.0+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+5.0+5.0	/

INDOOR UNITS COMBINATION MULMI0619C

One Unit (kW)	Two Unit (kW)		Three Unit (kW)					
7.0	2.0+7.0	5.0+6.0	2.0+2.0+3.5	2.0+2.6+8.0	2.0+6.0+8.0	2.6+5.0+5.0	3.5+5.0+5.0	5.0+6.0+7.0
8.0	2.0+8.0	5.0+7.0	2.0+2.0+5.0	2.0+3.5+3.5	2.6+2.6+2.6	2.6+5.0+6.0	3.5+5.0+6.0	5.0+6.0+8.0
9.0	2.6+5.0	5.0+8.0	2.0+2.0+6.0	2.0+3.5+5.0	2.6+2.6+3.5	2.6+5.0+7.0	3.5+5.0+7.0	6.0+6.0+6.0
10.5	2.6+6.0	6.0+6.0	2.0+2.0+7.0	2.0+3.5+6.0	2.6+2.6+5.0	2.6+5.0+8.0	3.5+5.0+8.0	6.0+6.0+7.0
/	2.6+7.0	6.0+7.0	2.0+2.0+8.0	2.0+3.5+7.0	2.6+2.6+6.0	2.6+6.0+6.0	3.5+6.0+6.0	6.0+6.0+8.0
/	2.6+8.0	6.0+8.0	2.0+2.0+9.0	2.0+3.5+8.0	2.6+2.6+7.0	2.6+6.0+7.0	3.5+6.0+7.0	/
/	3.5+3.5	7.0+7.0	2.0+2.0+10.5	2.0+5.0+5.0	2.6+2.6+8.0	2.6+6.0+8.0	3.5+6.0+8.0	/
/	3.5+5.0	7.0+8.0	2.0+2.6+2.6	2.0+5.0+6.0	2.6+3.5+3.5	3.5+3.5+3.5	5.0+5.0+5.0	/
/	3.5+6.0	8.0+8.0	2.0+2.6+3.5	2.0+5.0+7.0	2.6+3.5+5.0	3.5+3.5+5.0	5.0+5.0+6.0	/
/	3.5+7.0	/	2.0+2.6+5.0	2.0+5.0+8.0	2.6+3.5+6.0	3.5+3.5+6.0	5.0+5.0+7.0	/
/	3.5+8.0	/	2.0+2.6+6.0	2.0+6.0+6.0	2.6+3.5+7.0	3.5+3.5+7.0	5.0+5.0+8.0	/
/	5.0+5.0	/	2.0+2.6+7.0	2.0+6.0+7.0	2.6+3.5+8.0	3.5+3.5+8.0	5.0+6.0+6.0	/

Four Unit (kW)							
2.0+2.0+2.0+2.0	2.0+2.0+5.0+5.0	2.0+2.6+5.0+7.0	2.0+5.0+5.0+8.0	2.6+2.6+6.0+7.0	2.6+3.5+6.0+6.0	3.5+5.0+5.0+6.0	2.6+2.6+5.0+7.0
2.0+2.0+2.0+2.6	2.0+2.0+5.0+6.0	2.0+2.6+5.0+8.0	2.0+5.0+6.0+6.0	2.6+2.6+6.0+8.0	2.6+3.5+6.0+7.0	3.5+5.0+5.0+7.0	2.6+2.6+5.0+8.0
2.0+2.0+2.0+3.5	2.0+2.0+5.0+7.0	2.0+2.6+6.0+6.0	2.0+5.0+6.0+7.0	2.6+2.6+2.6+3.5	2.6+3.5+6.0+8.0	3.5+5.0+5.0+8.0	2.6+2.6+6.0+6.0
2.0+2.0+2.0+5.0	2.0+2.0+5.0+8.0	2.0+2.6+6.0+7.0	2.0+6.0+6.0+6.0	2.6+2.6+2.6+5.0	2.6+5.0+5.0+5.0	3.5+5.0+6.0+6.0	2.6+3.5+5.0+6.0
2.0+2.0+2.0+6.0	2.0+2.0+6.0+6.0	2.0+2.6+6.0+8.0	2.0+6.0+6.0+7.0	2.6+2.6+2.6+6.0	2.6+5.0+5.0+6.0	3.5+5.0+6.0+7.0	2.6+3.5+5.0+7.0
2.0+2.0+2.0+7.0	2.0+2.0+6.0+7.0	2.0+3.5+3.5+3.5	2.0+6.0+6.0+8.0	2.6+2.6+2.6+7.0	2.6+5.0+6.0+6.0	3.5+5.0+6.0+8.0	2.6+3.5+5.0+8.0
2.0+2.0+2.0+8.0	2.0+2.0+6.0+8.0	2.0+3.5+3.5+5.0	2.6+2.6+2.6+2.6	2.6+2.6+2.6+3.5	2.6+6.0+6.0+6.0	3.5+6.0+6.0+6.0	3.5+3.5+6.0+7.0
2.0+2.0+2.0+9.0	2.0+2.6+2.6+2.6	2.0+3.5+3.5+6.0	2.6+2.6+3.5+3.5	2.6+2.6+2.6+5.0	3.5+3.5+3.5+3.5	3.5+6.0+6.0+7.0	3.5+3.5+6.0+8.0
2.0+2.0+2.0+10.5	2.0+2.6+2.6+3.5	2.0+3.5+3.5+7.0	2.6+2.6+3.5+5.0	2.6+2.6+2.6+6.0	3.5+3.5+3.5+5.0	3.5+6.0+6.0+8.0	3.5+5.0+5.0+5.0
2.0+2.0+2.6+2.6	2.0+2.6+2.6+5.0	2.0+3.5+3.5+8.0	2.6+2.6+3.5+6.0	2.6+2.6+2.6+7.0	3.5+3.5+3.5+6.0	2.0+2.0+3.5+6.0	2.0+5.0+5.0+7.0
2.0+2.0+2.6+3.5	2.0+2.6+2.6+6.0	2.0+3.5+5.0+5.0	2.6+2.6+3.5+7.0	2.6+2.6+2.6+8.0	3.5+3.5+3.5+7.0	2.0+2.0+3.5+7.0	/
2.0+2.0+2.6+5.0	2.0+2.6+2.6+7.0	2.0+3.5+5.0+6.0	2.6+2.6+3.5+8.0	2.6+3.5+3.5+3.5	3.5+3.5+3.5+8.0	2.0+2.0+3.5+8.0	/
2.0+2.0+2.6+6.0	2.0+2.6+2.6+8.0	2.0+3.5+5.0+7.0	2.6+2.6+3.5+6.0	2.6+3.5+3.5+5.0	3.5+3.5+5.0+5.0	2.0+2.6+3.5+8.0	/
2.0+2.0+2.6+7.0	2.0+2.6+3.5+3.5	2.0+3.5+5.0+8.0	2.6+2.6+3.5+7.0	2.6+3.5+3.5+6.0	3.5+3.5+5.0+6.0	2.0+2.6+5.0+5.0	/
2.0+2.0+2.6+8.0	2.0+2.6+3.5+5.0	2.0+3.5+6.0+6.0	2.6+2.6+3.5+8.0	2.6+3.5+3.5+7.0	3.5+3.5+5.0+7.0	2.0+2.6+5.0+6.0	/
2.0+2.0+3.5+3.5	2.0+2.6+3.5+6.0	2.0+3.5+6.0+7.0	2.6+2.6+5.0+5.0	2.6+3.5+3.5+8.0	3.5+3.5+5.0+8.0	2.0+5.0+5.0+5.0	/
2.0+2.0+3.5+5.0	2.0+2.6+3.5+7.0	2.0+3.5+6.0+8.0	2.6+2.6+5.0+6.0	2.6+3.5+5.0+5.0	3.5+3.5+6.0+6.0	2.0+5.0+5.0+6.0	/

Five Unit (kW)						
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+6.0+6.0	2.0+2.0+2.6+6.0+8.0	2.0+2.6+2.6+2.6+2.6	2.0+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+3.5	2.6+2.6+5.0+5.0+6.0	3.5+3.5+3.5+3.5+7.0
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+6.0+7.0	2.0+2.0+3.5+3.5+3.5	2.0+2.6+2.6+2.6+3.5	2.0+2.6+3.5+5.0+5.0	2.6+2.6+2.6+2.6+5.0	2.6+2.6+5.0+6.0+6.0	3.5+3.5+3.5+3.5+8.0
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+6.0+8.0	2.0+2.0+3.5+3.5+5.0	2.0+2.6+2.6+2.6+5.0	2.0+2.6+3.5+5.0+6.0	2.6+2.6+2.6+2.6+6.0	2.6+2.6+6.0+6.0+6.0	3.5+3.5+3.5+5.0+5.0
2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.6+2.6+2.6	2.0+2.0+3.5+3.5+6.0	2.0+2.6+2.6+2.6+6.0	2.0+2.6+3.5+5.0+7.0	2.6+2.6+2.6+2.6+7.0	2.6+3.5+3.5+3.5+3.5	3.5+3.5+3.5+5.0+6.0
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.6+2.6+3.5	2.0+2.0+3.5+3.5+7.0	2.0+2.6+2.6+2.6+7.0	2.0+2.6+3.5+5.0+8.0	2.6+2.6+2.6+2.6+8.0	2.6+3.5+3.5+3.5+5.0	3.5+3.5+3.5+6.0+6.0
2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.6+2.6+5.0	2.0+2.0+3.5+3.5+8.0	2.0+2.6+2.6+2.6+8.0	2.0+2.6+3.5+6.0+6.0	2.6+2.6+2.6+3.5+3.5	2.6+3.5+3.5+3.5+6.0	/
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+3.5+3.5+9.0	2.0+2.6+2.6+3.5+3.5	2.0+2.6+3.5+6.0+7.0	2.6+2.6+2.6+3.5+5.0	2.6+3.5+3.5+3.5+7.0	/
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.6+2.6+7.0	2.0+2.0+3.5+3.5+10.5	2.0+2.6+2.6+3.5+5.0	2.0+2.6+3.5+6.0+8.0	2.6+2.6+2.6+3.5+6.0	2.6+3.5+3.5+3.5+8.0	/
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+5.0+5.0	2.0+2.6+2.6+3.5+6.0	2.0+2.6+5.0+5.0+5.0	2.6+2.6+2.6+3.5+7.0	2.6+3.5+3.5+5.0+5.0	/
2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.6+3.5+3.5	2.0+2.0+3.5+5.0+6.0	2.0+2.6+2.6+3.5+7.0	2.0+2.6+6.0+6.0+6.0	2.6+2.6+2.6+3.5+8.0	2.6+3.5+3.5+5.0+6.0	/
2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.6+3.5+5.0	2.0+2.0+3.5+5.0+7.0	2.0+2.6+2.6+3.5+8.0	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+5.0+5.0	2.6+3.5+3.5+6.0+6.0	/
2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.6+3.5+6.0	2.0+2.0+3.5+5.0+8.0	2.0+2.6+2.6+3.5+5.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+5.0+6.0	3.5+3.5+3.5+3.5+5.0	/
2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.6+3.5+7.0	2.0+2.0+3.5+6.0+6.0	2.0+2.6+2.6+3.5+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+5.0+7.0	3.5+3.5+3.5+3.5+5.0	/
2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.6+3.5+8.0	2.0+2.0+3.5+6.0+7.0	2.0+2.6+2.6+3.5+7.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+5.0+8.0	3.5+3.5+3.5+3.5+6.0	/
2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.6+3.5+9.0	2.0+2.0+3.5+6.0+8.0	2.0+2.6+2.6+3.5+8.0	2.0+3.5+3.5+3.5+8.0	2.6+2.6+2.6+6.0+6.0	2.6+2.6+3.5+5.0+5.0	/
2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.6+3.5+10.5	2.0+2.0+5.0+5.0+5.0	2.0+2.6+2.6+6.0+6.0	2.0+3.5+3.5+5.0+5.0	2.6+2.6+2.6+6.0+7.0	2.6+2.6+3.5+5.0+6.0	/
2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.6+5.0+5.0	2.0+2.0+5.0+5.0+6.0	2.0+2.6+2.6+6.0+7.0	2.0+3.5+3.5+6.0+6.0	2.6+2.6+2.6+6.0+8.0	2.6+2.6+3.5+5.0+7.0	/
2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.6+5.0+6.0	2.0+2.0+5.0+5.0+7.0	2.0+2.6+2.6+6.0+8.0	2.0+3.5+5.0+5.0+5.0	2.6+2.6+3.5+3.5+5.0	2.6+2.6+3.5+5.0+8.0	/
2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.6+5.0+7.0	2.0+2.0+5.0+5.0+8.0	2.0+2.6+3.5+3.5+3.5	2.0+3.5+5.0+5.0+6.0	2.6+2.6+3.5+3.5+5.0	2.6+2.6+3.5+6.0+6.0	/
2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.6+5.0+8.0	2.0+2.0+6.0+6.0+6.0	2.0+2.6+3.5+3.5+5.0	2.0+3.5+5.0+6.0+6.0	2.6+2.6+3.5+3.5+6.0	2.6+2.6+3.5+6.0+7.0	/
2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.6+6.0+6.0	2.0+2.0+6.0+6.0+7.0	2.0+2.6+3.5+3.5+6.0	2.0+3.5+6.0+6.0+6.0	2.6+2.6+3.5+3.5+7.0	2.6+2.6+3.5+6.0+8.0	/
2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.6+6.0+7.0	2.0+2.0+6.0+6.0+8.0	2.0+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+2.6	2.6+2.6+3.5+3.5+8.0	2.6+2.6+5.0+5.0+5.0	/

Six Unit (kW)						
2.0+2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.0+3.5+9.0	2.0+2.0+2.0+2.6+5.0+5.0	2.0+2.0+2.6+2.6+2.6+6.0	2.0+2.0+2.6+3.5+6.0+6.0	2.0+2.6+2.6+2.6+6.0+6.0	2.6+2.6+2.6+2.6+2.6+7.0
2.0+2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.0+3.5+10.5	2.0+2.0+2.0+2.6+5.0+6.0	2.0+2.0+2.6+2.6+2.6+7.0	2.0+2.0+3.5+3.5+3.5+3.5	2.0+2.6+2.6+3.5+3.5+3.5	2.6+2.6+2.6+2.6+2.6+8.0
2.0+2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.0+2.6+5.0+7.0	2.0+2.0+2.6+2.6+2.6+8.0	2.0+2.0+3.5+3.5+3.5+5.0	2.0+2.6+2.6+3.5+3.5+5.0	2.6+2.6+2.6+2.6+3.5+3.5
2.0+2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.0+2.6+5.0+8.0	2.0+2.0+2.6+2.6+3.5+3.5	2.0+2.0+3.5+3.5+3.5+6.0	2.0+2.6+2.6+3.5+3.5+6.0	2.6+2.6+2.6+2.6+3.5+5.0
2.0+2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.0+2.6+6.0+6.0	2.0+2.0+2.6+2.6+3.5+5.0	2.0+2.0+3.5+3.5+3.5+7.0	2.0+2.6+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+3.5+6.0
2.0+2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.0+2.6+6.0+7.0	2.0+2.0+2.6+2.6+3.5+6.0	2.0+2.0+3.5+3.5+3.5+8.0	2.0+2.6+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+3.5+7.0
2.0+2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+2.0+6.0+6.0	2.0+2.0+2.0+2.6+6.0+8.0	2.0+2.0+2.6+2.6+3.5+7.0	2.0+2.0+3.5+3.5+5.0+5.0	2.0+2.6+2.6+3.5+3.5+5.0	2.6+2.6+2.6+2.6+3.5+8.0
2.0+2.0+2.0+2.0+2.0+9.0	2.0+2.0+2.0+2.0+6.0+7.0	2.0+2.0+2.0+3.5+3.5+3.5	2.0+2.0+2.6+2.6+3.5+8.0	2.0+2.0+3.5+3.5+5.0+6.0	2.0+2.6+2.6+3.5+5.0+6.0	2.6+2.6+2.6+2.6+5.0+5.0
2.0+2.0+2.0+2.0+2.0+10.5	2.0+2.0+2.0+2.0+6.0+8.0	2.0+2.0+2.0+3.5+3.5+5.0	2.0+2.0+2.6+2.6+5.0+5.0	2.0+2.0+3.5+3.5+6.0+6.0	2.0+2.6+2.6+3.5+6.0+6.0	2.6+2.6+2.6+2.6+5.0+6.0
2.0+2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.0+3.5+3.5+6.0	2.0+2.0+2.6+2.6+5.0+6.0	2.0+2.6+2.6+2.6+2.6+2.6	2.0+2.6+3.5+3.5+3.5+3.5	2.6+2.6+2.6+2.6+6.0+6.0
2.0+2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.0+3.5+3.5+7.0	2.0+2.0+2.6+2.6+5.0+7.0	2.0+2.6+2.6+2.6+2.6+3.5	2.0+2.6+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+3.5+3.5
2.0+2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.0+2.6+2.6+5.0	2.0+2.0+2.0+3.5+3.5+8.0	2.0+2.0+2.6+2.6+5.0+8.0	2.0+2.6+2.6+2.6+2.6+5.0	2.0+2.6+3.5+3.5+3.5+6.0	2.6+2.6+2.6+3.5+3.5+5.0
2.0+2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.0+3.5+5.0+5.0	2.0+2.0+2.6+2.6+6.0+6.0	2.0+2.6+2.6+2.6+2.6+6.0	2.0+3.5+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+3.5+6.0
2.0+2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.0+2.6+2.6+7.0	2.0+2.0+2.0+3.5+5.0+6.0	2.0+2.0+2.6+2.6+6.0+7.0	2.0+2.6+2.6+2.6+2.6+7.0	2.0+3.5+3.5+3.5+3.5+5.0	2.6+2.6+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.0+2.6+2.6+8.0	2.0+2.0+2.0+3.5+5.0+7.0	2.0+2.0+2.6+2.6+6.0+8.0	2.0+2.6+2.6+2.6+2.6+8.0	2.0+3.5+3.5+3.5+3.5+6.0	2.6+2.6+3.5+3.5+3.5+5.0
2.0+2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.6+2.6+2.6+5.0	2.0+2.0+2.0+3.5+5.0+8.0	2.0+2.0+2.6+3.5+3.5+3.5	2.0+2.6+2.6+2.6+3.5+3.5	2.0+3.5+3.5+3.5+3.5+3.5	2.6+2.6+3.5+3.5+3.5+6.0
2.0+2.0+2.0+2.6+3.5+8.0	2.0+2.0+2.6+3.5+5.0+6.0	2.0+2.0+2.0+3.5+6.0+6.0	2.0+2.0+2.6+3.5+3.5+5.0	2.0+2.6+2.6+2.6+3.5+5.0	2.0+3.5+3.5+3.5+3.5+5.0	2.6+3.5+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.0+2.6+3.5+3.5	2.0+2.0+2.0+3.5+6.0+7.0	2.0+2.0+2.6+3.5+3.5+6.0	2.0+2.6+2.6+2.6+3.5+6.0	2.0+3.5+3.5+3.5+3.5+6.0	2.6+3.5+3.5+3.5+3.5+5.0
2.0+2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.0+2.6+3.5+5.0	2.0+2.0+2.0+3.5+6.0+8.0	2.0+2.0+2.6+3.5+3.5+7.0	2.0+2.6+2.6+2.6+3.5+7.0	2.6+2.6+2.6+2.6+2.6+2.6	2.6+3.5+3.5+3.5+3.5+6.0
2.0+2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.0+2.6+3.5+6.0	2.0+2.0+2.6+2.6+2.6+2.6	2.0+2.0+2.6+3.5+3.5+8.0	2.0+2.6+2.6+2.6+3.5+8.0	2.6+2.6+2.6+2.6+2.6+3.5	3.5+3.5+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.0+2.6+3.5+7.0	2.0+2.0+2.6+2.6+2.6+3.5	2.0+2.0+2.6+3.5+5.0+5.0	2.0+2.6+2.6+2.6+5.0+5.0	2.6+2.6+2.6+2.6+2.6+5.0	3.5+3.5+3.5+3.5+3.5+5.0
2.0+2.6+2.6+2.6+5.0+6.0	2.6+2.6+2.6+2.6+2.6+6.0	3.5+3.5+3.5+3.5+3.5+6.0	/	/	/	/

World's No.1 Residential Inverter Air Conditioner Company For 2 Consecutive Years



1. Data source: Euromonitor International (Shanghai) Limited; Consumer Appliances 2026ed, retail volume sales in units, 2024 to 2025 data.

Midea HVAC & Energy Australia
MD APPLIANCES PTY LTD
Head Office Address: 1513 Dandenong Road, Oakleigh VIC Australia
Phone: 1300 726 002
Website: mdhome.com.au
Email: info@mdhome.com.au