



MIDEA HEATING AND COOLING

MULTI SPLIT



OFFICIAL PARTNER

Midea, established in 1968 is a public company listed and since July 2016 a Fortune 500 company offering one of the most comprehensive ranges in the home appliances industry. Midea specializes in air treatment (residential and commercial solutions), refrigeration, laundry, cooking appliances, small kitchen appliances, water appliances, floor care and lighting.

Midea is My True Blue Idea

Our objective is to deliver the best home solutions for every Australia family. Our home solutions are inspired by the ideas and needs of our Australian guests. Therefore, we created the slogan "Midea is My True Blue Idea".

MD Appliances Pty Ltd

Founded in 2018 as MD Appliances Pty Ltd, we proudly represents Midea's Air conditioning products in Australia. Our mission is to bring Midea's world-class air conditioning solutions to the Australian market, ensuring that homes and commercial buildings alike benefit from cutting-edge technology, energy efficiency, and superior comfort.

more than
\$53.08B USD
of revenue in
2024

serve
customers in
100+
countries

40
global
production
centers

190K+
employees
worldwide

global Fortune
277
company



**7 years parts and
labor warranty**

For Hi-Wall/ Ducted/ Cassette/ VRF
/ Heat pump/ Window Box A/C



**5 years parts and
labor warranty**

For Window Box A/C



**2 years parts and
labor warranty**

For Heavy Commercial Products



**Local after sales
service and support**

* Source Euromonitor International (Shanghai) Limited; Consumer Appliances 23ed, retail volume sales in unit, 2022 data


Our Technology:

THE EXCLUSIVE INVERTER QUATTRO™ TECHNOLOGY



A brain that calculates your needs in any conditions

Midea's Genius Core Energy Chip with Precise-control Inverter Deduction Algorithm reduces energy loss by enabling more precise signal reception, accurate data processing, and prompt delivery of instructions to the compressor. As a result, Midea's inverter compressor offers more stable operation than common inverters. Its super-smooth inverter frequency of variation ensures you never notice fluctuations in room temperature.

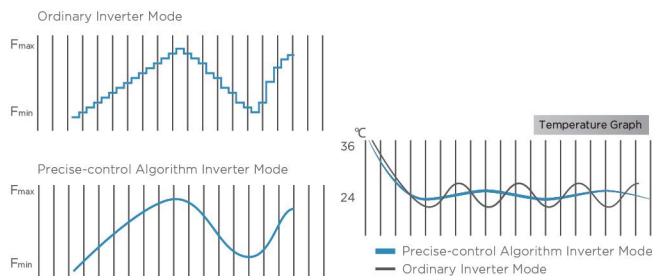

Up to **71%**
Ultra Energy Saving

65Hz in **6** seconds
Flash Cooling/Heating


Within
 $\pm 0.5^{\circ}\text{C}$
Comfort With
Stable Temperature

Superior operation from
60 to -30°C
High Ambient Cooling/Heating

FULL DC INVERTER SYSTEM

Thanks to the Full DC Inverter System, Midea's air conditioners achieved 20% higher **energy efficiency compared to** normal AC inverters.


On top of the Midea's Full DC Inverter System, the Genius Core is an intelligent commander that keeping the harmony internally and externally.




**Sine-wave
DC inverter control**




**Rear-earth
magnet motor**



**IPM DC
Fan Motor**

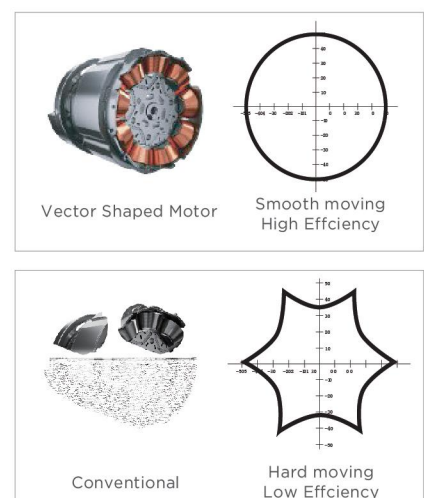

THE PERFECT MULTI ROOM SOLUTION

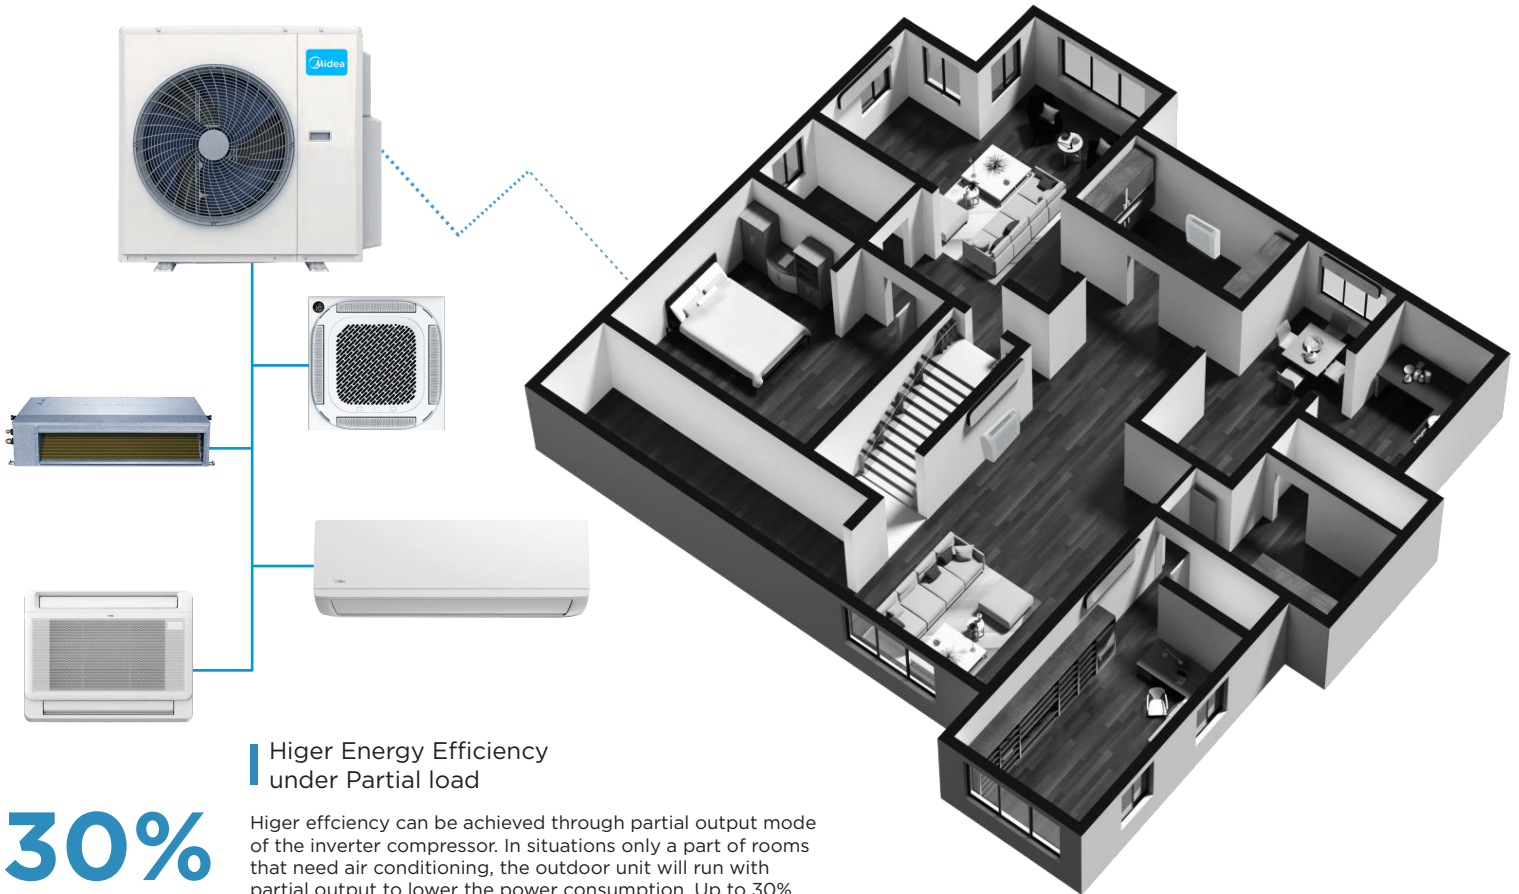

Higer Energy Efficiency under Partial load

30%

Higer efficiency can be achieved through partial output mode of the inverter compressor. In situations only a part of rooms that need air conditioning, the outdoor unit will run with partial output to lower the power consumption. Up to 30% less energy use under partial load.

Bionic Blower Wheel and Improved Air Duct

Based on natural models and bionic principles, Midea's fan blade design can effectively reduce airflow resistance and noise. Together with the optimized air duct, it delivers the same air flow volume with 30% less energy consumption.



Ordinary fan blade design



Midea high static pressure fan blade design



Standard air duct damper



High-efficiency air duct damper

V-PAM (Vector + I-PAM) Inverter Control

V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology. With this technology, further miniaturization, higher efficiency, and better performance are attained.

Full DC Inverter Control



Twin-Rotary Compressor

The Twin-Rolling compressor system rotating with 180° symmetrical balance ensures low vibration & noise due to the small torque

MULM10371B, MULM10480B,
MULM10513B, MULM10618B

Inner Groove-Tube

A densely serrated shape has been applied to the copper to enlarge the heat exchange area. The latest heat exchanger has increased the tooth-count from 45 to 54, further improving the efficiency of heat transfer.

CUSTOMISE CHOICE

Midea Inverter Multi Split Systems provide 4 indoor unit types—Wall Mounted, Ducted, Compact Cassettes, and Floor Console—offering endless combination possibilities. Pair up to 6 indoor units with an outdoor unit featuring capacities from 5kW to 18kW. With this wide range of unit types and capacities, Midea delivers a system tailored to meet virtually any need.

Seamless & Sleek


Experience ultimate comfort with Midea's Wall Mounted Split Systems, designed for discreet yet powerful performance. The Turbo Function ensures rapid cooling and heating, while the optimized air tunnel design enhances airflow distribution. Control your system effortlessly from anywhere using the midea Mobile App via Wi-Fi, making it easy to adjust settings remotely.

Space-Saving Design


Ideal for tight spaces, Midea's Ducted and Cassette indoor units maximize efficiency without compromising style. The Ducted unit operates quietly, hidden within bulkheads or ceiling cavities for a seamless look. Meanwhile, the low-profile Inverter Cassette delivers 360° airflow, perfect for open-plan living areas.

Flexible & Functional


The Midea Floor Console ensures efficient heating and cooling with its dual-outlet design for fast temperature adjustments. Choose between wall-mounted or floor-standing installation to suit your space. Plus, enjoy convenient Wi-Fi control via the Android or Apple app, allowing remote temperature adjustments anytime, anywhere.

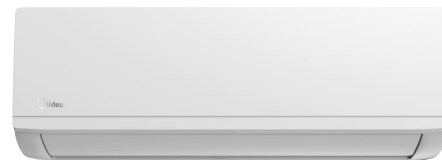

Wall Mounted Split System

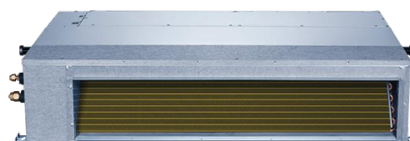

Ceiling Ducted

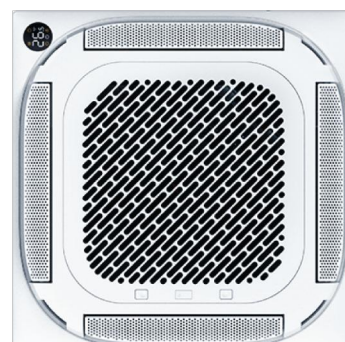

Ceiling Mounted Compact Cassette



Floor Console

FLEXIBLE INSTALLATION



Midea Multi split system

Maximizing efficiency and comfort.

Midea's innovative multi-split system allows one outdoor unit to connect with up to 6 indoor units, each with independent control. This flexible setup not only saves space but also reduces energy costs by letting you heat or cool only the rooms you need.




Midea Single Split Systems



AUTOMATIC WIRING/PIPING CORRECTION

Midea multi-split unit helps the technicians to easily finish the wiring and piping. It saves great efforts by automatically correcting the connection and avoids any trial operations of every indoor unit after installation. The technicians press “check switch”, wait for few minutes and the machine will begin to operate as expected.

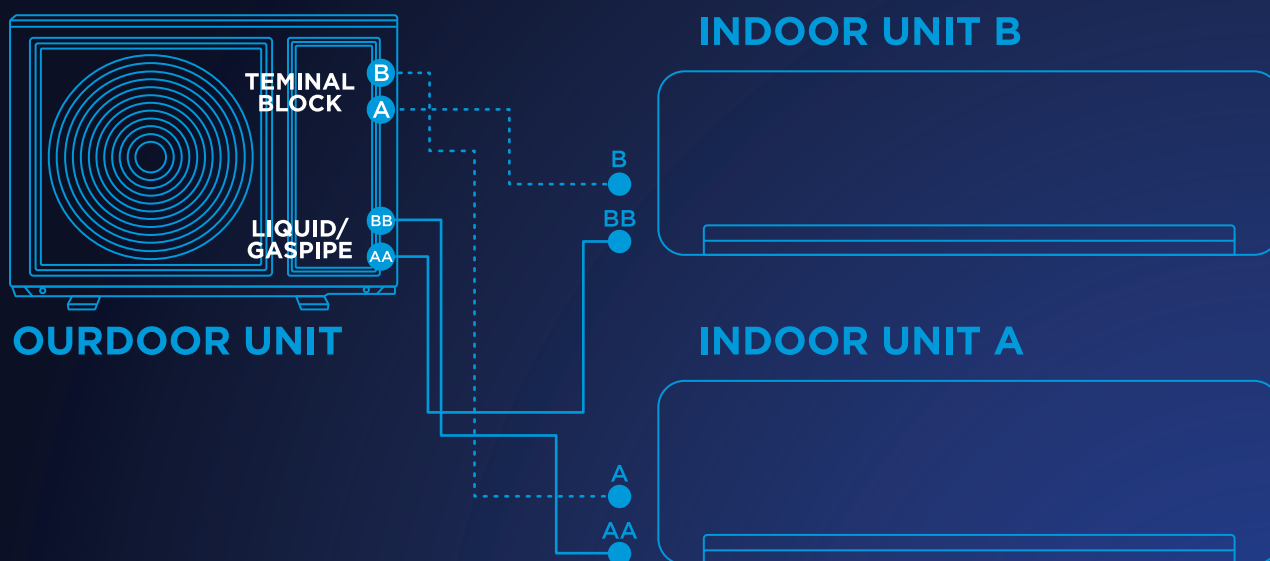

MULTI-SPLIT UNIT - THE RIGHT AIR SOLUTION FOR MULTIPLE SPACE



MULTI ODU



Multi ODU	Cooling Capacity (kW)	Heating Capacity (kW)	Max. IDU amounts
MULMI0250B	5.25 (0.9 - 5.7)	5.5 (1.9 - 5.7)	Up to 2 units
MULMI0371B	7.10 (3.22-8.79)	8.0 (2.05-8.79)	Up to 3 units
MULMI0490B	9.15 (2.73-10.55)	9.6 (2.87-10.55)	Up to 4 units
MULMI0513B	13.5 (2.63-14.65)	14.0 (2.63-15.24)	Up to 5 units
MULMI0619B	19.0 (5.39-19.63)	21.5 (3.9-22.57)	Up to 6 units

WIRELESS CONTROLLER FEATURE LIST



- * Comes in the box for all split systems.
- * Optional for all cassettes and ducted systems.
(To use a wireless controller, a ducted system will require a wired controller as a signal receiver.)

Temperature range	16-30°C 62-86°F
Backlight	√
Press Button	√
ON/OFF	√
Mode	√
Temp Adjustment	√
Fanspeed	√
Turbo	√
Follow Me	√
Timer ON/OFF	√
Child Lock	√
Dry	√
Setting Temp Limit	√

MULTI SPLIT OUTDOOR



Model Number			MULMI0250B	MULMI0371B	MULMI0490B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (indoor+Outdoor)*	kW	5.25	7.1	9.15
	Power Input (indoor+Outdoor)	kW	1.3	1.95	2.35
	Rated current (Indoor+Outdoor)	A	6.81	8.68	10.6
	AEER (Indoor+Outdoor)*	W/W	3.94	3.57	3.81
	TCSPF (HOT/MIX/COLD)		6.514/5.609/5.737	5.977/5.169/5.302	6.503/5.578/5.756
Heating	Capacity (Indoor+Outdoor)*	kW	5.5	8.0	9.6
	Power input (indoor+Outdoor)*	kW	1.16	1.64	2.3
	Rated current (indoor+Outdoor)*	A	6.65	7.5	10.3
	ACOP (Indoor+Outdoor)	W/W	4.62	4.0	4.0
	HPSF (HOT/MIX/COLD)		5.094/4.658/4.022	5.086/4.712/4.333	5.181/4.518/3.915
Max.current		A	12	17.5	19.0
Outdoor unit	Dimension(H*W*D)	mm	554×805x330	673×890x342	810x946x410
	Packing(H*W*D)	mm	615x915x370	750x1030x438	885x1090x500
	Net/Gross weight	Kg	34.6/37.7	48.1/51.6	61 / 66
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	20	30	40
Refrigerant piping	Liquid side		2 x Ø6.35(2x1/4in)	3 x Ø6.35(3x1/4in)	4 x Ø6.35(4x1/4in)
	Gas side		2 x Ø9.52(2x3/8in)	3 x Ø9.52(3x3/8in)	3xØ9.52+1xØ12.7(3x3/8in+1x1/2in)
	Max. length for all rooms	m	40	60	80
	Max.length for one indoor unit	m	25	30	35
	Min. length for one indoor unit	m	6	9	12
	Max. height difference(m)	OU to IU	15	15	15
		IU to IU	10	10	10
Model Number			MULMI0513B		MULMI0619B
Power supply		Ph-V-Hz	220-240-1-50		220-240-1-50
Cooling	Capacity (indoor+Outdoor)*	kW	13.5		19.0
	Power Input (indoor+Outdoor)	kW	3.73		5.1
	Rated current (Indoor+Outdoor)	A	17.8		24.1
	AEER (Indoor+Outdoor)*	W/W	3.56		3.42
	TCSPF (HOT/MIX/COLD)		5.959/5.304/5.53		5.774/5.221/5.503
Heating	Capacity (Indoor+Outdoor)*	kW	14.0		21.5
	Power input (indoor+Outdoor)*	kW	3.15		5.1
	Rated current (indoor+Outdoor)*	A	16.2		29.0
	ACOP (Indoor+Outdoor)	W/W	4.35		4.15
	HPSF (HOT/MIX/COLD)		5.545/4.8/4.312		5.372/4.509/3.748
Max.current		A	30		33
Outdoor unit	Dimension(H*W*D)	mm	975×980x415		1333x952x415
	Packing(H*W*D)	mm	1080x1145x500		1480x1095x495
	Net/Gross weight	Kg	91/106.4		110.6/124.9
Refrigerant	Type		R32		R32
	Pre-charged length for all indoor to outdoor	m	50		60
Refrigerant piping	Liquid side		5 x Ø6.35(5x1/4")		6 x Ø6.35(6x1/4in)
	Gas side		3x Ø9.52 + 2 x Ø12.7(3x3/8" + 2 x 1/2")		4 x Ø9.52+2x Ø12.7(4x3/8in+2x1/2in)
	Max. length for all rooms	m	80		80
	Max.length for one indoor unit	m	35		35
	Min. length for one indoor unit	m	15		15
	Max. height difference(m)	OU to IU	15		15
		IU to IU	10		10

MULTI SPLIT HIGH WALLS




Venus

Model Number			MFAG20VB-N	MFAG26VB-N	MFAG35VB-N	MFAG50VB-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	2.05	2.5	3.5	5.0
Rated Heating	Capacity	kw	2.37	2.79	4.0	5.54
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	550/460/340/270/130	630/500/360/300/180	660/530/380/310/200	950/800/600/500/450
Indoor noise evel/ (Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	42.5/38/33/25/22	45.5/39/32/25/20	45/39.5/33/26/19.5	48.5/45.5/38/30.5/20
Indoor noise level(sound power)		dB(A)	52.9	57	59	60.5
Indoor unit	Dimenson(H*W*D)	mm	292×729×200	295×802×200	295×802×200	321×971×228
	Packing(H*W*D)	mm	375×790×270	380×875×285	380×875×285	405×1045×305
	Net/Gross weight	Kg	7.9/10.2	8.6/11.1	8.5/11.1	11/14.6
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /12.7mm(1/2in)

Model Number			MFAG60VB-N	MFAG70VB-N	MFAG80VB-N	MFAG90VB-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	6.0	7.0	7.65	9.0
Rated Heating	Capacity	kw	6.5	7.5	8.2	9.5
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	950/800/600/500/450	1214/1053/683/504/492	1214/1053/683/504/492	1350/1110/760/560/350
Indoor noise evel/ (Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	48.5/45.5/38/30.5/20	52/50/41.5/27/21	52/50/41.5/27/21	54.5/52/45.5/34.5/22.5
Indoor noise level(sound power)		dB(A)	59.6	65.1	64.8	65.2
Indoor unit	Dimenson(H*W*D)	mm	321×971×228	337×1082×234	337×1082×234	362×1259×283
	Packing(H*W*D)	mm	405×1045×305	315×1155×415	315×1155×415	385×1340×450
	Net/Gross weight	Kg	11/14.6	13.2/17.1	13.2/17.1	19.0/24.7
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)	9.52mm(3/8in) /15.9mm(5/8in)

DUCTED CONNECTED



MULMID07C
MULMID09C
MULMID12C
MULMID18C
DUCMI701C

Model Number			MULMID07C	MULMID09C	MULMID12C
Cooling	Capacity	kW	2.0	2.6	3.5
Heating	Capacity	kW	2.34	2.9	3.8
Indoor air flow		m ³ /h	620/540/450	620/540/450	660/570/470
External Static	Rated	Pa	25	25	25
Pressure	Range	Pa	0-100	0-100	0-100
Indoor noise level (Hi/Mi/Lo)		dB(A)	35/33/31/27	35/33/31/27	35/33/31/26
Indoor unit	Dimension (H*W*D)	mm	200x700x450	200x700x450	200x700x450
	Packing (H*W*D)	mm	285x860x540	285x860x540	285x860x540
	Net / Gross weight	Kg	16.6/19.8	16.6/19.8	16.6/19.8
Design pressure		MPa	4.3/1.7	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	2xØ6.35 / 2xØ9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")
Standard Thermostat type			Remote Control	Remote Control	Remote Control

Model Number			MULMID18C	DUCMI701C
Cooling	Capacity	kW	5.28	7.3
Heating	Capacity	kW	6.0	7.5
Indoor air flow		m ³ /h	900/780/650	1500/1300/1000
External Static	Rated	Pa	25	25
Pressure	Range	Pa	0-160	0-160
Indoor noise level (Hi/Mi/Lo)		dB(A)	36.5/34/31/25	38/36/33/28
Indoor unit	Dimension (H*W*D)	mm	245x700x750	245x1000x750
	Packing (H*W*D)	mm	298x925x850	304x1225x860
	Net / Gross weight	Kg	24.4/29	31.5/36.9
Design pressure		MPa	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø12.7(1/4"/1/2")	Ø9.52 / Ø15.9(3/8"/5/8")
Standard Thermostat type			Remote Control	Wire Control

COMPACT CASSETTE



MULMIC12C
MULMIC18C

Model Number			MULMIC12C	MULMIC18C
Cooling	Capacity	kW	3.5	5.3
Heating	Capacity	kW	3.5	5.5
Indoor air flow		m³/h	620/520/330	660/540/300
Indoor noise level (Hi/Mi/Lo)		dB(A)	42/38.5/31.5	44/41/31.5
Indoor unit	Dimension (H*W*D)	mm	245 x570x570	245x570x570
	Packing (H*W*D)	mm	295x715x640	295x715x640
	Net / Gross weight	Kg	16.1/18.8	16.2/19
Design pressure		MPa	4.2/1.5	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø12.7(1/4"/1/2")
Standard Thermostat type			Remote control	Remote control

FLOOR CONSOLE

MFCS50VA-N



Model Number			MFCS50VA-N
Power supply		Ph-V-Hz	220-240V-1Ph-50Hz
Rated Cooling	Capacity	kW	4.7
Rated Heating	Capacity	kW	5.2
Indoor air flow (Turbo/Hi/Mi/Lo/Silence)		L/s	255/229/202/176
Indoor noise level / (Turbo/Hi/Mi/Lo/Silence) (sound pressure)		dB(A)	42/39/29/25
Indoor unit	Dimension (H*W*D)	mm	621x794x200
	Packing (H*W*D)	mm	719x865x280
	Net / Gross weight	Kg	14.9/18.8
Refrigerant piping	Liquid side / Gas side	mm(inch)	6.35mm(1/4") / 12.7mm(1/2")
Operation temperature		°c	16-30
Room temperature	Indoor(cooling/heating)	°c	16-32/0-30
	Outdoor(cooling/heating)	°c	0-50/-30-24

INDOOR UNITS COMBINATION

DEFAULT RATIO

Model	MULMIO250B	MULMIO371B	MULMIO490B	MULMIO513B	MULMIO619B
Ratio	182%	183%	178%	149%	141%

INDOOR UNITS COMBINATION MULMIO250B

One Unit (kW)	Two Unit (kW)			
3.5	2.0+2.0	2.0+5.0	2.6+3.5	3.5+3.5
5.3	2.0+2.6	2.0+6.0	2.6+5.0	3.5+5.0
/	2.0+3.5	2.6+2.6	2.6+6.0	3.5+6.0

INDOOR UNITS COMBINATION MULMIO371B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)		
5.0	2.0+2.0	2.6+2.6	3.5+3.5	2.0+2.0+2.0	2.0+2.6+5.0	2.6+3.5+5.0
6.0	2.0+2.6	2.6+3.5	3.5+5.0	2.0+2.0+2.6	2.0+2.6+6.0	2.6+3.5+6.0
/	2.0+3.5	2.6+5.0	3.5+6.0	2.0+2.0+3.5	2.6+2.6+2.6	3.5+3.5+3.5
/	2.0+5.0	2.6+6.0	/	2.0+2.0+5.0	2.6+2.6+3.5	3.5+3.5+5.0
/	2.0+6.0	/	/	2.0+2.0+6.0	2.6+2.6+5.0	3.5+3.5+6.0
/	/	/	/	2.0+2.6+2.6	2.6+2.6+6.0	/
/	/	/	/	2.0+2.6+3.5	2.6+3.5+3.5	/

INDOOR UNITS COMBINATION MULMIO490B

One Unit (kW)	Two Unit (kW)				Three Unit (kW)				
7.0	2.0+2.0	2.6+2.6	3.5+3.5	5.0+5.0	2.0+2.0+2.0	2.0+2.6+2.6	2.0+3.5+5.0	2.6+3.5+5.0	/
8.0	2.0+2.6	2.6+3.5	3.5+5.0	5.0+6.0	2.0+2.0+2.6	2.0+2.6+3.5	2.0+3.5+6.0	2.6+3.5+6.0	/
/	2.0+3.5	2.6+5.0	3.5+6.0	6.0+6.0	2.0+2.0+3.5	2.0+2.6+5.0	2.6+2.6+2.6	3.5+3.5+3.5	/
/	2.0+5.0	2.6+6.0	3.5+7.0	/	2.0+2.0+5.0	2.0+2.6+6.0	2.6+2.6+3.5	3.5+3.5+5.0	/
/	2.0+6.0	2.6+7.0	3.5+8.0	/	2.0+2.0+6.0	2.0+2.6+7.0	2.6+2.6+5.0	3.5+3.5+6.0	/
/	2.0+7.0	2.6+8.0	/	/	2.0+2.0+7.0	2.0+2.6+8.0	2.6+2.6+6.0	/	/
/	2.0+8.0	/	/	/	2.0+2.0+8.0	2.0+3.5+3.5	2.6+3.5+3.5	/	/
Four Unit (kW)									
2.0+2.0+2.0+2.0		2.0+2.0+2.6+2.6		2.0+2.6+2.6+2.6		2.0+3.5+3.5+3.5		2.6+2.6+3.5+3.5	
2.0+2.0+2.0+2.6		2.0+2.0+2.6+3.5		2.0+2.6+2.6+3.5		2.0+3.5+3.5+5.0		2.6+2.6+3.5+5.0	
2.0+2.0+2.0+3.5		2.0+2.0+2.6+5.0		2.0+2.6+2.6+5.0		2.0+3.5+3.5+6.0		2.6+2.6+3.5+6.0	
2.0+2.0+2.0+5.0		2.0+2.0+2.6+6.0		2.0+2.6+2.6+6.0		2.6+2.6+2.6+2.6		2.6+3.5+3.5+3.5	
2.0+2.0+2.0+6.0		2.0+2.0+3.5+3.5		2.0+2.6+3.5+3.5		2.6+2.6+2.6+3.5		3.5+3.5+3.5+3.5	
2.0+2.0+2.0+7.0		2.0+2.0+3.5+5.0		2.0+2.6+3.5+5.0		2.6+2.6+2.6+5.0		/	
2.0+2.0+2.0+8.0		2.0+2.0+3.5+6.0		2.0+2.6+3.5+6.0		2.6+2.6+2.6+6.0		/	

INDOOR UNITS COMBINATION MULMI0513B

One Unit (kW)		Two Unit (kW)			Three Unit (kW)				
7.0	2.0+5.0	3.5+3.5	5.0+5.0	2.0+2.0+3.5	2.0+2.6+6.0	2.0+5.0+5.0	2.6+2.6+8.0	2.6+6.0+6.0	
8.0	2.0+6.0	3.5+5.0	5.0+6.0	2.0+2.0+5.0	2.0+2.6+7.0	2.0+5.0+6.0	2.6+3.5+3.5	3.5+3.5+3.5	
/	2.0+7.0	3.5+6.0	5.0+7.0	2.0+2.0+6.0	2.0+2.6+8.0	2.0+6.0+6.0	2.6+3.5+5.0	3.5+3.5+5.0	
/	2.0+8.0	3.5+7.0	5.0+8.0	2.0+2.0+7.0	2.0+3.5+3.5	2.6+2.6+2.6	2.6+3.5+6.0	3.5+3.5+6.0	
/	2.6+5.0	3.5+8.0	6.0+6.0	2.0+2.0+8.0	2.0+3.5+5.0	2.6+2.6+3.5	2.6+3.5+7.0	3.5+3.5+7.0	
/	2.6+6.0	/	6.0+7.0	2.0+2.6+2.6	2.0+3.5+6.0	2.6+2.6+5.0	2.6+3.5+8.0	3.5+3.5+8.0	
/	2.6+7.0	/	6.0+8.0	2.0+2.6+3.5	2.0+3.5+7.0	2.6+2.6+6.0	2.6+5.0+5.0	3.5+5.0+5.0	
/	2.6+8.0	/	/	2.0+2.6+5.0	2.0+3.5+8.0	2.6+2.6+7.0	2.6+5.0+6.0	3.5+5.0+6.0	
/	/	/	/	/	/	/	/	3.5+6.0+6.0	
Four Unit (kW)									
2.0+2.0+2.0+2.0	2.0+2.0+2.6+5.0	2.0+2.0+5.0+5.0	2.0+2.6+3.5+5.0	2.0+2.6+5.0+5.0	2.6+2.6+5.0+6.0	3.5+3.5+3.5+7.0			
2.0+2.0+2.0+2.6	2.0+2.0+2.6+6.0	2.0+2.0+5.0+6.0	2.0+2.6+3.5+6.0	2.0+2.6+5.0+6.0	2.6+3.5+3.5+3.5	3.5+3.5+3.5+8.0			
2.0+2.0+2.0+3.5	2.0+2.0+2.6+7.0	2.0+2.6+2.6+2.6	2.0+2.6+3.5+7.0	2.6+2.6+2.6+8.0	2.6+3.5+3.5+5.0	2.0+3.5+3.5+3.5			
2.0+2.0+2.0+5.0	2.0+2.0+2.6+8.0	2.0+2.6+2.6+3.5	2.6+2.6+2.6+2.6	2.6+2.6+3.5+3.5	2.6+3.5+3.5+6.0	2.0+3.5+3.5+5.0			
2.0+2.0+2.0+6.0	2.0+2.0+3.5+3.5	2.0+2.6+2.6+5.0	2.6+2.6+2.6+3.5	2.6+2.6+3.5+5.0	2.6+3.5+3.5+7.0	2.0+3.5+3.5+6.0			
2.0+2.0+2.0+7.0	2.0+2.0+3.5+5.0	2.0+2.6+2.6+6.0	2.6+2.6+2.6+5.0	2.6+2.6+3.5+6.0	2.6+3.5+3.5+8.0	2.0+3.5+3.5+7.0			
2.0+2.0+2.0+8.0	2.0+2.0+3.5+6.0	2.0+2.6+2.6+7.0	2.6+2.6+2.6+6.0	2.6+2.6+3.5+7.0	3.5+3.5+3.5+3.5	2.0+3.5+3.5+8.0			
2.0+2.0+2.6+2.6	2.0+2.0+3.5+7.0	2.0+2.6+2.6+8.0	2.6+2.6+2.6+7.0	2.6+2.6+3.5+8.0	3.5+3.5+3.5+5.0	2.0+3.5+5.0+5.0			
2.0+2.0+2.6+3.5	2.0+2.0+3.5+8.0	2.0+2.6+3.5+3.5	2.0+2.6+3.5+8.0	2.6+2.6+5.0+5.0	3.5+3.5+3.5+6.0	2.0+3.5+5.0+6.0			
Five Unit (kW)									
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+3.5+3.5					
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.6+3.5+3.5	2.0+2.0+3.5+3.5+5.0					
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.6+3.5+5.0	2.0+2.0+3.5+3.5+6.0					
2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.6+3.5+6.0	2.0+2.0+3.5+3.5+7.0					
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.6+3.5+7.0	2.0+2.0+3.5+3.5+8.0					
2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.6+3.5+8.0	2.0+2.0+3.5+5.0+5.0					
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.6+2.6+5.0	2.0+2.0+2.6+5.0+5.0	2.0+2.0+3.5+5.0+6.0					
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.6+5.0+6.0	2.0+2.0+3.5+6.0+6.0					
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.6+2.6+7.0	2.0+2.0+2.6+6.0+6.0	2.0+2.6+2.6+2.6+2.6					
Five Unit (kW)									
2.0+2.6+2.6+2.6+3.5	2.0+2.6+2.6+6.0+6.0	2.6+2.6+2.6+2.6+2.6	2.6+2.6+2.6+5.0+6.0						
2.0+2.6+2.6+2.6+5.0	2.0+2.6+3.5+3.5+3.5	2.6+2.6+2.6+2.6+3.5	2.6+2.6+2.6+6.0+6.0						
2.0+2.6+2.6+2.6+6.0	2.0+2.6+3.5+3.5+5.0	2.6+2.6+2.6+2.6+5.0	2.6+2.6+3.5+3.5+3.5						
2.0+2.6+2.6+2.6+7.0	2.0+2.6+3.5+3.5+6.0	2.6+2.6+2.6+2.6+6.0	2.6+2.6+3.5+3.5+5.0						
2.0+2.6+2.6+2.6+8.0	2.0+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+7.0	2.6+2.6+3.5+3.5+6.0						
2.0+2.6+2.6+3.5+3.5	2.0+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+8.0	2.6+3.5+3.5+3.5+3.5						
2.0+2.6+2.6+3.5+5.0	2.0+2.6+3.5+5.0+5.0	2.6+2.6+2.6+3.5+3.5	2.6+3.5+3.5+3.5+5.0						
2.0+2.6+2.6+3.5+6.0	2.0+2.6+3.5+5.0+6.0	2.6+2.6+2.6+3.5+5.0	2.6+3.5+3.5+3.5+6.0						
2.0+2.6+2.6+3.5+7.0	2.0+2.6+3.5+6.0+6.0	2.6+2.6+2.6+3.5+6.0	3.5+3.5+3.5+3.5+3.5						
2.0+2.6+2.6+3.5+8.0	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+7.0	/						
2.0+2.6+2.6+5.0+5.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+8.0	/						
2.0+2.6+2.6+5.0+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+5.0+5.0	/						

INDOOR UNITS COMBINATION MULMI0619B

One Unit (kW)		Two Unit (kW)			Three Unit (kW)				
7.0	2.0+7.0	3.5+6.0	6.0+7.0	2.0+2.0+3.5	2.0+2.6+8.0	2.0+5.0+7.0	2.6+2.6+6.0	2.6+5.0+5.0	3.5+3.5+5.0
8.0	2.0+8.0	3.5+7.0	6.0+8.0	2.0+2.0+5.0	2.0+2.6+9.0	2.0+5.0+8.0	2.6+2.6+7.0	2.6+5.0+6.0	3.5+3.5+6.0
9.0	2.0+9.0	3.5+8.0	6.0+9.0	2.0+2.0+6.0	2.0+2.6+10.5	2.0+5.0+9.0	2.6+2.6+8.0	2.6+5.0+7.0	3.5+3.5+7.0
10.5	2.0+10.5	3.5+9.0	6.0+10.5	2.0+2.0+7.0	2.0+3.5+3.5	2.0+5.0+10.5	2.6+2.6+9.0	2.6+5.0+8.0	3.5+3.5+8.0
/	2.6+5.0	3.5+10.5	7.0+7.0	2.0+2.0+8.0	2.0+3.5+5.0	2.0+6.0+6.0	2.6+2.6+10.5	2.6+5.0+9.0	3.5+3.5+9.0
/	2.6+6.0	5.0+5.0	7.0+8.0	2.0+2.0+9.0	2.0+3.5+6.0	2.0+6.0+7.0	2.6+3.5+3.5	2.6+5.0+10.5	3.5+3.5+10.5
/	2.6+7.0	5.0+6.0	8.0+8.0	2.0+2.0+10.5	2.0+3.5+7.0	2.0+6.0+8.0	2.6+3.5+5.0	2.6+6.0+6.0	3.5+5.0+5.0
/	2.6+8.0	5.0+7.0	/	2.0+2.6+2.6	2.0+3.5+8.0	2.0+6.0+9.0	2.6+3.5+6.0	2.6+6.0+7.0	3.5+5.0+6.0
/	2.6+9.0	5.0+8.0	/	2.0+2.6+3.5	2.0+3.5+9.0	2.0+6.0+10.5	2.6+3.5+7.0	2.6+6.0+8.0	3.5+5.0+7.0
/	2.6+10.5	5.0+9.0	/	2.0+2.6+5.0	2.0+3.5+10.5	2.6+2.6+2.6	2.6+3.5+8.0	2.6+6.0+9.0	3.5+5.0+8.0
/	3.5+3.5	5.0+10.5	/	2.0+2.6+6.0	2.0+5.0+5.0	2.6+2.6+3.5	2.6+3.5+9.0	2.6+6.0+10.5	3.5+5.0+9.0
/	3.5+5.0	6.0+6.0	/	2.0+2.6+7.0	2.0+5.0+6.0	2.6+2.6+5.0	2.6+3.5+10.5	3.5+3.5+3.5	3.5+5.0+10.5

Three Unit (kW)						
3.5+6.0+6.0	3.5+6.0+9.0	5.0+5.0+6.0	5.0+5.0+9.0	5.0+6.0+7.0	6.0+6.0+7.0	6.0+6.0+10.5
3.5+6.0+7.0	3.5+6.0+10.5	5.0+5.0+7.0	5.0+5.0+10.5	5.0+6.0+8.0	6.0+6.0+8.0	/
3.5+6.0+8.0	5.0+5.0+5.0	5.0+5.0+8.0	5.0+6.0+6.0	6.0+6.0+6.0	6.0+6.0+9.0	/
Four Unit (kW)						
2.0+2.0+2.0+2.0	2.0+2.0+3.5+7.0	2.0+2.6+2.6+8.0	2.0+2.6+6.0+10.5	2.0+5.0+5.0+6.0	2.6+2.6+5.0+6.0	3.5+3.5+3.5+7.0
2.0+2.0+2.0+2.6	2.0+2.0+3.5+8.0	2.0+2.6+2.6+9.0	2.0+3.5+3.5+5.5	2.0+5.0+5.0+7.0	2.6+2.6+5.0+7.0	2.6+3.5+3.5+5.0
2.0+2.0+2.0+3.5	2.0+2.0+3.5+9.0	2.0+2.6+2.6+10.5	2.0+3.5+3.5+5.0	2.0+5.0+5.0+8.0	2.6+2.6+5.0+8.0	2.6+3.5+3.5+6.0
2.0+2.0+2.0+5.0	2.0+2.0+3.5+10.5	2.0+2.6+3.5+3.5	2.0+3.5+3.5+6.0	2.0+5.0+6.0+6.0	2.6+2.6+5.0+9.0	2.6+3.5+3.5+7.0
2.0+2.0+2.0+6.0	2.0+2.0+5.0+5.0	2.0+2.6+3.5+5.0	2.0+3.5+3.5+7.0	2.0+5.0+6.0+7.0	2.6+2.6+5.0+10.5	2.6+3.5+3.5+8.0
2.0+2.0+2.0+7.0	2.0+2.0+5.0+6.0	2.0+2.6+3.5+6.0	2.0+3.5+3.5+8.0	2.0+6.0+6.0+6.0	2.6+2.6+6.0+6.0	2.6+3.5+3.5+9.0
2.0+2.0+2.0+8.0	2.0+2.0+5.0+7.0	2.0+2.6+3.5+7.0	2.0+3.5+3.5+9.0	2.0+6.0+6.0+7.0	2.6+2.6+6.0+7.0	2.6+3.5+3.5+10.5
2.0+2.0+2.0+9.0	2.0+2.0+5.0+8.0	2.0+2.6+3.5+8.0	2.0+3.5+3.5+10.5	2.0+6.0+6.0+8.0	2.6+2.6+6.0+8.0	2.6+3.5+5.0+5.0
2.0+2.0+2.0+10.5	2.0+2.0+5.0+9.0	2.0+2.6+3.5+9.0	2.0+3.5+5.0+5.0	2.6+2.6+2.6+2.6	2.6+2.6+6.0+9.0	2.6+3.5+5.0+6.0
2.0+2.0+2.6+2.6	2.0+2.0+5.0+10.5	2.0+2.6+3.5+10.5	2.0+3.5+5.0+6.0	2.6+2.6+3.5+3.5	2.6+2.6+6.0+10.5	2.6+3.5+5.0+7.0
2.0+2.0+2.6+3.5	2.0+2.0+6.0+6.0	2.0+2.6+5.0+5.0	2.0+3.5+5.0+7.0	2.6+2.6+3.5+5.0	2.6+2.6+2.6+3.5	2.6+3.5+5.0+8.0
2.0+2.0+2.6+5.0	2.0+2.0+6.0+7.0	2.0+2.6+5.0+6.0	2.0+3.5+5.0+8.0	2.6+2.6+3.5+6.0	2.6+2.6+2.6+5.0	2.6+3.5+6.0+6.0
2.0+2.0+2.6+6.0	2.0+2.0+6.0+8.0	2.0+2.6+5.0+7.0	2.0+3.5+5.0+9.0	2.6+2.6+3.5+7.0	2.6+2.6+2.6+6.0	2.6+3.5+6.0+7.0
2.0+2.0+2.6+7.0	2.0+2.0+6.0+9.0	2.0+2.6+5.0+8.0	2.0+3.5+5.0+10.5	2.6+2.6+3.5+8.0	2.6+2.6+2.6+7.0	2.6+3.5+6.0+8.0
2.0+2.0+2.6+8.0	2.0+2.0+6.0+10.5	2.0+2.6+5.0+9.0	2.0+3.5+6.0+6.0	2.6+2.6+3.5+6.0	2.6+2.6+2.6+3.5	2.6+5.0+5.0+5.0
2.0+2.0+2.6+9.0	2.0+2.6+2.6+2.6	2.0+2.6+5.0+10.5	2.0+3.5+6.0+7.0	2.6+2.6+3.5+7.0	2.6+2.6+2.6+5.0	2.6+5.0+5.0+6.0
2.0+2.0+2.6+10.5	2.0+2.6+2.6+3.5	2.0+2.6+6.0+6.0	2.0+3.5+6.0+8.0	2.6+2.6+3.5+8.0	2.6+2.6+2.6+6.0	2.6+5.0+6.0+6.0
2.0+2.0+3.5+3.5	2.0+2.6+2.6+5.0	2.0+2.6+6.0+7.0	2.0+3.5+6.0+9.0	2.6+2.6+3.5+9.0	2.6+2.6+2.6+7.0	2.6+6.0+6.0+6.0
2.0+2.0+3.5+5.0	2.0+2.6+2.6+6.0	2.0+2.6+6.0+8.0	2.0+3.5+6.0+10.5	2.6+2.6+3.5+10.5	2.6+2.6+2.6+8.0	3.5+3.5+3.5+3.5
2.0+2.0+3.5+6.0	2.0+2.6+2.6+7.0	2.0+2.6+6.0+9.0	2.0+5.0+5.0+5.0	2.6+2.6+5.0+5.0	2.6+2.6+2.6+9.0	3.5+3.5+3.5+5.0
/	/	/	/	/	2.6+2.6+2.6+10.5	3.5+3.5+3.5+6.0
Five Unit (kW)						
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+3.5+9.0	2.0+2.0+2.6+3.5+9.0	2.0+2.0+3.5+6.0+8.0	2.0+2.6+2.6+3.5+10.5	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+7.0
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+3.5+10.5	2.0+2.0+2.6+3.5+10.5	2.0+2.0+5.0+5.0+5.0	2.0+2.6+2.6+5.0+5.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+8.0
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.6+5.0+5.0	2.0+2.0+5.0+5.0+6.0	2.0+2.6+2.6+5.0+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+5.0+5.0
2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.6+5.0+6.0	2.0+2.0+5.0+5.0+7.0	2.0+2.6+2.6+5.0+7.0	2.0+3.5+3.5+3.5+7.0	2.6+2.6+2.6+5.0+6.0
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.6+5.0+7.0	2.0+2.0+5.0+5.0+8.0	2.0+2.6+2.6+5.0+8.0	2.0+3.5+3.5+3.5+8.0	2.6+2.6+2.6+5.0+7.0
2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.6+5.0+8.0	2.0+2.0+6.0+6.0+6.0	2.0+2.6+2.6+6.0+6.0	2.0+3.5+3.5+5.0+5.0	2.6+2.6+2.6+5.0+8.0
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+6.0+6.0	2.0+2.0+2.6+6.0+6.0	2.0+2.0+6.0+6.0+7.0	2.0+2.6+2.6+6.0+7.0	2.0+3.5+3.5+6.0+6.0	2.6+2.6+2.6+6.0+6.0
2.0+2.0+2.0+2.0+9.0	2.0+2.0+2.0+6.0+7.0	2.0+2.0+2.6+6.0+7.0	2.0+2.0+6.0+6.0+8.0	2.0+2.6+2.6+6.0+8.0	2.0+3.5+5.0+5.0+5.0	2.6+2.6+2.6+6.0+7.0
2.0+2.0+2.0+2.0+10.5	2.0+2.0+2.0+6.0+8.0	2.0+2.0+2.6+6.0+8.0	2.0+2.6+2.6+2.6+2.6	2.0+2.6+3.5+3.5+3.5	2.0+3.5+5.0+5.0+6.0	2.6+2.6+2.6+6.0+8.0
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.6+2.6+2.6	2.0+2.0+3.5+3.5+3.5	2.0+2.6+2.6+2.6+3.5	2.0+2.6+3.5+3.5+5.0	2.0+3.5+5.0+6.0+6.0	2.6+2.6+3.5+3.5+3.5
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.6+2.6+3.5	2.0+2.0+3.5+3.5+5.0	2.0+2.6+2.6+2.6+5.0	2.0+2.6+3.5+3.5+6.0	2.0+3.5+6.0+6.0+6.0	2.6+2.6+3.5+3.5+5.0
2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.6+2.6+5.0	2.0+2.0+3.5+3.5+6.0	2.0+2.6+2.6+2.6+6.0	2.0+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+2.6	2.6+2.6+3.5+3.5+6.0
2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+3.5+3.5+7.0	2.0+2.6+2.6+2.6+7.0	2.0+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+3.5	2.6+2.6+3.5+3.5+7.0
2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.6+2.6+7.0	2.0+2.0+3.5+3.5+8.0	2.0+2.6+2.6+2.6+8.0	2.0+2.6+3.5+5.0+5.0	2.6+2.6+2.6+2.6+5.0	2.6+2.6+3.5+3.5+8.0
2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+3.5+9.0	2.0+2.6+2.6+2.6+9.0	2.0+2.6+3.5+5.0+6.0	2.6+2.6+2.6+2.6+6.0	2.6+2.6+3.5+5.0+5.0
2.0+2.0+2.0+2.6+9.0	2.0+2.0+2.6+2.6+9.0	2.0+2.0+3.5+3.5+10.5	2.0+2.6+2.6+2.6+10.5	2.0+2.6+3.5+5.0+7.0	2.6+2.6+2.6+2.6+7.0	2.6+2.6+3.5+5.0+6.0
2.0+2.0+2.0+2.6+10.5	2.0+2.0+2.6+2.6+10.5	2.0+2.0+3.5+5.0+5.0	2.0+2.6+2.6+3.5+3.5	2.0+2.6+3.5+5.0+8.0	2.6+2.6+2.6+2.6+8.0	2.6+2.6+3.5+5.0+7.0
2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.6+3.5+3.5	2.0+2.0+3.5+5.0+6.0	2.0+2.6+2.6+3.5+5.0	2.0+2.6+3.5+6.0+6.0	2.6+2.6+2.6+2.6+9.0	2.6+2.6+3.5+5.0+8.0
2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.6+3.5+5.0	2.0+2.0+3.5+5.0+7.0	2.0+2.6+2.6+3.5+6.0	2.0+2.6+3.5+6.0+7.0	2.6+2.6+2.6+2.6+10.5	2.6+2.6+3.5+6.0+6.0
2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.6+3.5+6.0	2.0+2.0+3.5+5.0+8.0	2.0+2.6+2.6+3.5+7.0	2.0+2.6+3.5+6.0+8.0	2.6+2.6+2.6+3.5+3.5	2.6+2.6+3.5+6.0+7.0
2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.6+3.5+7.0	2.0+2.0+3.5+6.0+6.0	2.0+2.6+2.6+3.5+8.0	2.0+2.6+5.0+5.0+5.0	2.6+2.6+2.6+3.5+5.0	2.6+2.6+3.5+6.0+8.0
2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.6+3.5+8.0	2.0+2.0+3.5+6.0+7.0	2.0+2.6+2.6+3.5+9.0	2.0+2.6+6.0+6.0+6.0	2.6+2.6+2.6+3.5+6.0	2.6+2.6+5.0+5.0+5.0
Six Unit (kW)						
2.0+2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.0+3.5+9.0	2.0+2.0+2.0+2.6+5.0+5.0	2.0+2.0+2.6+2.6+2.6+6.0	2.0+2.0+2.6+3.5+6.0+6.0	2.0+2.6+2.6+2.6+6.0+6.0	2.6+2.6+2.6+2.6+2.6+7.0
2.0+2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.0+3.5+10.5	2.0+2.0+2.0+2.6+5.0+6.0	2.0+2.0+2.6+2.6+2.6+7.0	2.0+2.0+3.5+3.5+3.5+3.5	2.0+2.6+2.6+3.5+3.5+3.5	2.6+2.6+2.6+2.6+2.6+8.0
2.0+2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.0+2.6+5.0+7.0	2.0+2.0+2.6+2.6+2.6+8.0	2.0+2.0+3.5+3.5+3.5+5.0	2.0+2.6+2.6+3.5+3.5+5.0	2.6+2.6+2.6+2.6+3.5+3.5
2.0+2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.0+2.6+5.0+8.0	2.0+2.0+2.6+2.6+3.5+3.5	2.0+2.0+3.5+3.5+3.5+6.0	2.0+2.6+2.6+3.5+3.5+6.0	2.6+2.6+2.6+2.6+3.5+5.0
2.0+2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.0+2.6+6.0+6.0	2.0+2.0+2.6+2.6+3.5+5.0	2.0+2.0+3.5+3.5+3.5+7.0	2.0+2.6+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+3.5+6.0
2.0+2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.0+2.6+6.0+7.0	2.0+2.0+2.6+2.6+3.5+6.0	2.0+2.0+3.5+3.5+3.5+8.0	2.0+2.6+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+3.5+7.0
2.0+2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+2.0+6.0+6.0	2.0+2.0+2.0+2.6+6.0+8.0	2.0+2.0+2.6+2.6+3.5+7.0	2.0+2.0+3.5+3.5+5.0+5.0	2.0+2.6+2.6+3.5+5.0+5.0	2.6+2.6+2.6+2.6+3.5+8.0
2.0+2.0+2.0+2.0+2.0+9.0	2.0+2.0+2.0+2.0+6.0+7.0	2.0+2.0+2.0+3.5+3.5+3.5	2.0+2.0+2.6+2.6+3.5+8.0	2.0+2.0+3.5+3.5+5.0+6.0	2.0+2.6+2.6+3.5+5.0+6.0	2.6+2.6+2.6+2.6+5.0+5.0
2.0+2.0+2.0+2.0+2.0+10.5	2.0+2.0+2.0+2.0+6.0+8.0	2.0+2.0+2.0+3.5+3.5+5.0	2.0+2.0+2.6+2.6+5.0+5.0	2.0+2.0+3.5+3.5+6.0+6.0	2.0+2.6+2.6+3.5+6.0+6.0	2.6+2.6+2.6+2.6+5.0+6.0
2.0+2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.0+3.5+3.5+6.0	2.0+2.0+2.6+2.6+5.0+6.0	2.0+2.6+2.6+2.6+2.6+2.6	2.0+2.6+3.5+3.5+3.5+3.5	2.6+2.6+2.6+2.6+6.0+6.0
2.0+2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.0+3.5+3.5+7.0	2.0+2.0+2.6+2.6+5.0+7.0	2.0+2.6+2.6+2.6+2.6+3.5	2.0+2.6+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+3.5+5.0
2.0+2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.0+2.6+2.6+5.0	2.0+2.0+2.0+3.5+3.5+8.0	2.0+2.0+2.6+2.6+5.0+8.0	2.0+2.6+2.6+2.6+2.6+5.0	2.0+2.6+3.5+3.5+3.5+6.0	2.6+2.6+2.6+3.5+3.5+6.0
2.0+2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.0+3.5+5.0+5.0	2.0+2.0+2.6+2.6+6.0+6.0	2.0+2.6+2.6+2.6+2.6+6.0	2.0+3.5+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+3.5+6.0
2.0+2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.0+2.6+2.6+7.0	2.0+2.0+2.0+3.5+5.0+6.0	2.0+2.0+2.6+2.6+6.0+7.0	2.0+2.6+2.6+2.6+2.6+7.0	2.0+3.5+3.5+3.5+3.5+5.0	2.6+2.6+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.0+2.6+2.6+8.0	2.0+2.0+2.0+3.5+5.0+7.0	2.0+2.0+2.6+2.6+6.0+8.0	2.0+2.6+2.6+2.6+2.6+8.0	2.0+3.5+3.5+3.5+3.5+6.0	2.6+2.6+3.5+3.5+3.5+5.0
2.0+2.0+2.0+2.0+2.6+9.0	2.0+2.0+2.0+2.6+2.6+9.0	2.0+2.0+2.0+3.5+5.0+8.0	2.0+2.0+2.6+3.5+3.5+3.5	2.0+2.6+2.6+2.6+3.5+3.5	2.0+3.5+3.5+3.5+3.5+5.0	2.6+2.6+3.5+3.5+3.5+6.0
2.0+2.0+2.0+2.0+2.6+10.5	2.0+2.0+2.0+2.6+2.6+10.5	2.0+2.0+2.0+3.5+6.0+6.0	2.0+2.0+2.6+3.5+3.5+5.0	2.0+2.6+2.6+2.6+3.5+5.0	2.0+3.5+3.5+3.5+3.5+6.0	2.6+3.5+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.0+2.6+3.5+3.5	2.0+2.0+2.0+3.5+6.0+7.0	2.0+2.0+2.6+3.5+3.5+6.0	2.0+2.6+2.6+2.6+3.5+6.0	2.0+3.5+3.5+3.5+3.5+7.0	2.6+3.5+3.5+3.5+3.5+5.0
2.0+2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.0+2.6+3.5+5.0	2.0+2.0+2.0+3.5+6.0+8.0	2.0+2.0+2.6+3.5+3.5+7.0	2.0+2.6+2.6+2.6+3.5+7.0	2.6+2.6+2.6+2.6+2.6+2.6	2.6+3.5+3.5+3.5+3.5+6.0
2.0+2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.0+2.6+3.5+6.0	2.0+2.0+2.6+2.6+2.6+2.6	2.0+2.0+2.6+3.5+3.5+8.0	2.0+2.6+2.6+2.6+3.5+8.0	2.6+2.6+2.6+2.6+2.6+3.5	3.5+3.5+3.5+3.5+3.5+5.0
2.0+2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.0+2.6+3.5+7.0	2.0+2.0+2.6+2.6+2.6+3.5	2.0+2.0+2.6+3.5+5.0+5.0	2.0+2.6+2.6+2.6+5.0+5.0	2.6+2.6+2.6+2.6+2.6+5.0	3.5+3.5+3.5+3.5+3.5+6.0
2.0+2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.0+2.6+3.5+8.0	2.0+2.0+2.6+2.6+2.6+5.0	2.0+2.0+2.6+3.5+5.0+6.0	2.0+2.6+2.6+2.6+6.0+6.0	2.6+2.6+2.6+2.6+2.6+6.0	3.5+3.5+3.5+3.5+3.5+7.0

World's No.1 Residential Inverter Air Conditioning Company

World's No.1 Air Treatment Brand For 4 Consecutive Years



1. Date source: Euromonitor International (Shanghai) Ltd., measured in terms of the company's production volume of its brands' residential inverter air conditioners and in terms of the company's total production volume of residential inverter air conditioners (including OEM brands) in 2022 and 2023, respectively, based on research completed in Aug 2023 and Aug 2024. Inverter air conditioners refer to air conditioners installed with variable-speed drives.
2. Data source: Euromonitor International (Shanghai) Limited; Consumer Appliances 25ed, retail volume sales in units, 2020 to 2024 data.

Midea Air Conditioning Australia
MD APPLIANCES PTY LTD
Address: 7 Ordish Road Dandenong South VIC 3175 Australia
Phone: 1300 726 002
Website: mdhome.com.au
Email: info@mdhome.com.au