


**MIDEA Mini VRF
MDV-V200WN1(AU)**



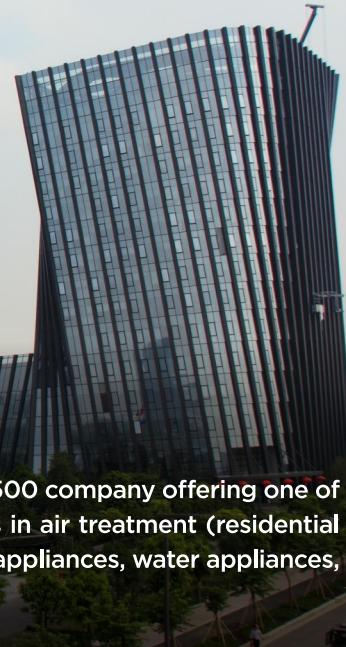

Midea, established in 1968 is a public company listed and since July 2016 a Fortune 500 company offering one of the most comprehensive ranges in the home appliances industry. Midea specializes in air treatment (residential and commercial solutions), refrigeration, laundry, cooking appliances, small kitchen appliances, water appliances, floor care and lighting.

Midea is My True Blue Idea

Our objective is to deliver the best home solutions for every Australia family. Our home solutions are inspired by the ideas and needs of our Australian guests. Therefore, we created the slogan "Midea is My True Blue Idea".

MD Appliances Pty Ltd

Founded in 2018 as MD Appliances Pty Ltd, we proudly represents Midea's Air conditioning products in Australia. Our mission is to bring Midea's world-class air conditioning solutions to the Australian market, ensuring that homes and commercial buildings alike benefit from cutting-edge technology, energy efficiency, and superior comfort.

more than
\$53.08B USD
of revenue in
2024

serve
customers in
100+
countries

40
global
production
centers

190K+
employees
worldwide

global Fortune
277
company



**7 years parts and
labor warranty**

For Hi-Wall/ Ducted/ Cassette/ VRV
/ Heat pump



**5 years parts and
labor warranty**

For Window Box A/C



**2 years parts and
labor warranty**

For Heavy Commercial Products




**Local after sales
service and support**

* Source Euromonitor International (Shanghai) Limited; Consumer Appliances 23ed, retail volume sales in unit, 2022 data

All Flare* Connections, The Easiest VRF to Install

The system uses all flare connection which can greatly simplify installation. The multiple branch box with 1 to 2,3,4,5 or 6 options further simplify installation.

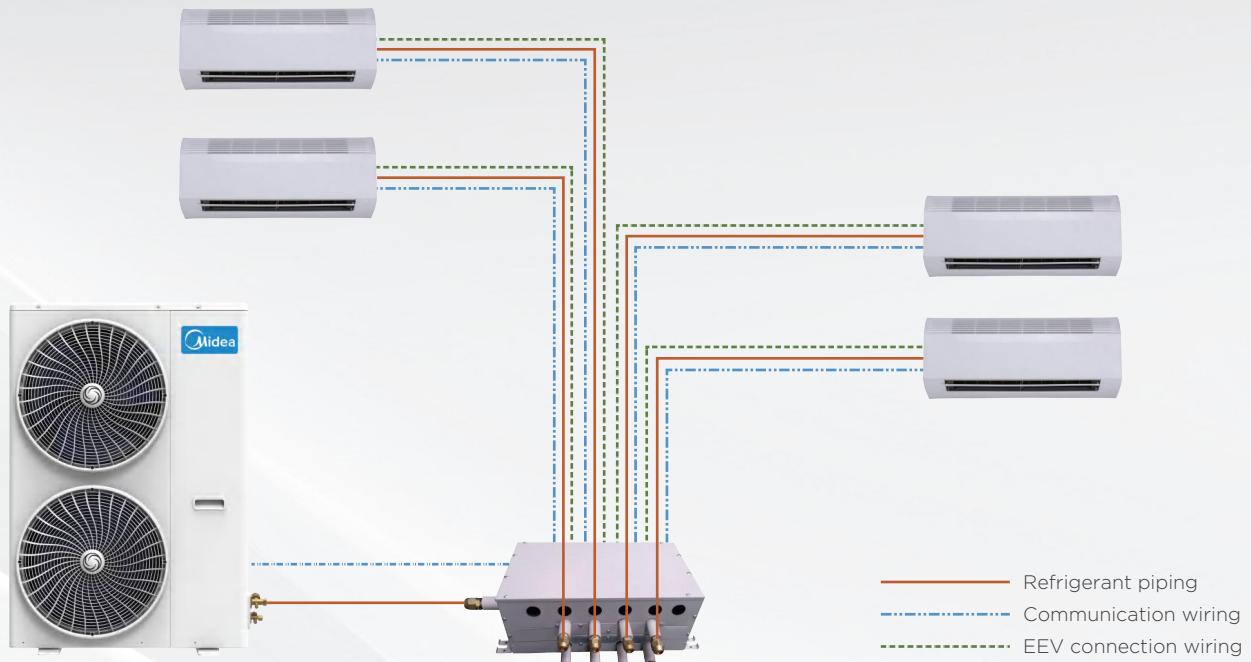

Note:

*Reused flared branch joints are not permitted for indoor use..

1 to 6 Indoor Units Connection

A single outdoor unit supports 1 to 6* indoor units, freeing up considerable space outside. Use your backyard more wisely with much more space available created by less number of outdoor units.


Branch Box	FQH-03A	FQH-04A	FQH-05A	FQH-06A
Max. number of indoor unit	3	4	5	6
Appearance				

*The combination ratio of indoor units and outdoor unit does not exceed 130%.

*The pictures of the Branch Box are for reference only, and the pictures are updated without notice.

Less Required Space for Mini VRF Installation

Mini VRF use flare connections instead of welding, which facilitates owners a lot to save their cost for installation, as well as avoid health hazard by welding such as strip-lighting or extra-high temperature.

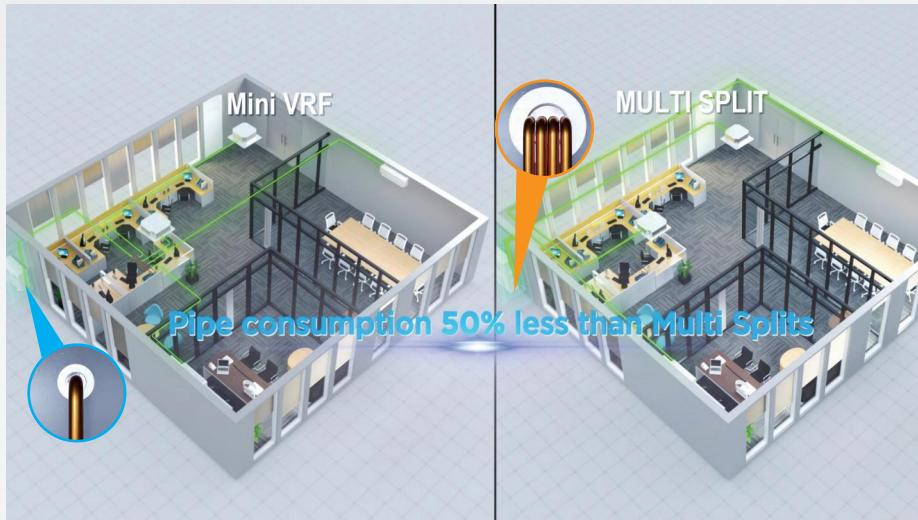

Comparing with multi split, Mini VRF has some distinctive advantages as follows:

- ◆ less pipe space requirement
- ◆ Less pipe consumption
- ◆ No special requirement for pipe holes
- ◆ keep your house neat and tidy.




Longer Piping Capability

The Mini VRF provides a total piping length possibility of 80m, a maximum height difference between outdoor and indoor units of 30m. These generous allowances facilitate an extensive array of system designs.





Full DC Inverter Technology

The Mini VRF uses full DC inverter compressor and fan motor to achieve high precision stepless speed adjustment according to system operation, and ensures that the system is always in optimum condition, operating more efficiently, more consistently and with less noise.

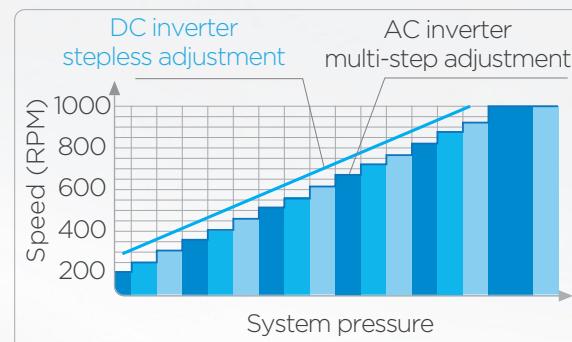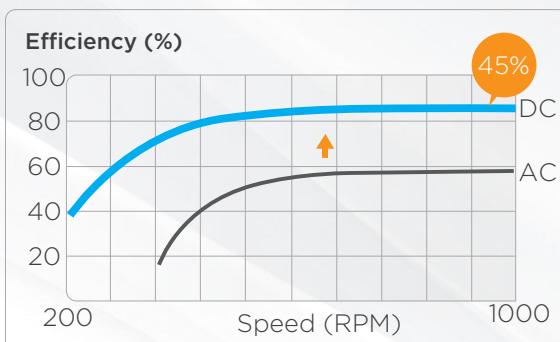

Wide Operation Range


Mini VRF can operate in a wide ambient temperature range. It can operate stably from -5°C up to 55°C in cooling mode and from -15°C to 27°C in heating mode.

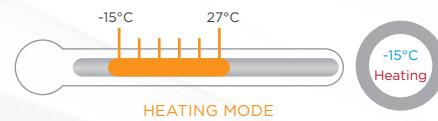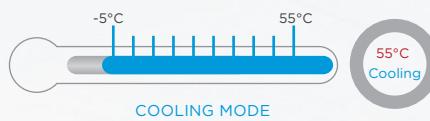

Branch Box Installation

Incorrect installation direction

The electronic expansion valve inside the branch box must not be installed upside down (an inverted position results in valve flow regulation or valve closure issues due to gravity).

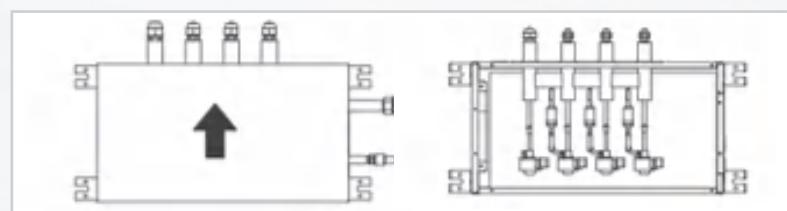

Ceiling Mounting

The Wall Mounted new heat exchanger is designed to meet the installation requirements close to the ceiling, and the minimum distance from the ceiling is 3cm.




There is some distance from ceiling



The distance from the ceiling is 3cm

High-lift drain pump*


A drain pump with a 1200mm raise height is fitted as customized, simplifying installation of the drain piping.

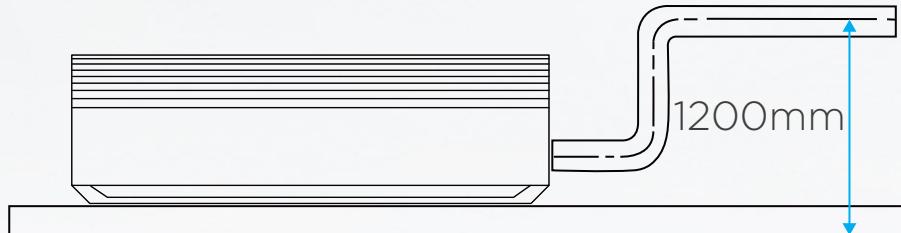

*The drain pump is available as a customization option.

WiFi module*


With the built-in WiFi module, you can remotely control the power on/off, adjust the temperature, switch modes and other functions via SmartHome APP.

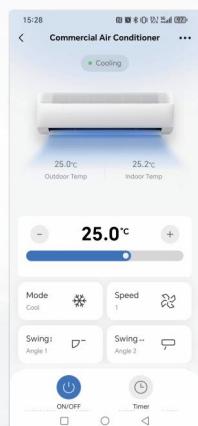


*Wifi module is available as a customization option

AIR FLOW*

Possibility to select automatic vertical and horizontal moving of the air discharge louvre, for uniform air flow and temperature distribution.

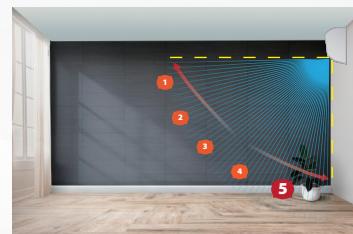

Up & Down

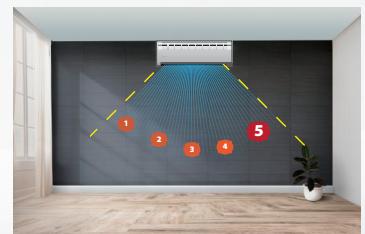

Right & Left

*Horizontal Swing function is available as a customization option for Wall Mounted.

Specifications

Outdoor unit

Model				MDV-V200WN1(AU)
Power supply				220-240V/50
Heating ¹	Capacity	kW		21.0
	Power input	kW		5.0
Cooling ²	Capacity	kW		15.5
	Power input	kW		4.0
Connected indoor unit	Total capacity		60-130% of outdoor unit capacity ⁴	
	Maximum quantity ⁵		6	
Ambient temp. operation range	Cooling	°C		-15-55
	Heating	°C		-20-27
Sound pressure level(cooling/heating) ³	dB(A)			59/59
Refrigerant	Type			
	Charge	Kg	4.4	
pipe size	Liquid	mm	9.52	
	Gas	mm	19.1	
Max. height difference	m		30(ODU up)	
	m		20(ODU down)	
Max. piping length	m			80
Net dimension(W*H*D)	mm			902×1327×320
Packing dimension(W*H*D)	mm			1082×1406×434
Net/Gross weight	kg			103/111

Notes:

1. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.

2. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.

3. Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1m.

During actual operation, these values are normally somewhat higher as a result of ambient conditions.

4. If you have a need for more than 6 Wall Mounted indoor units, please contact Midea.

5. 60-130% is system combination ratio, combination ratio=Sum of capacity indexes of the indoor units/Capacity index of the outdoor units

*The above data may be changed without notice for future improvement on quality and performance.

Indoor unit

Model			MIH28GHN18-A	MIH36GHN18-A	MIH45GHN18-A
Power supply	1phase, 220-240V,50/60Hz				
Cooling ¹	Capacity	kW	2.8	3.6	4.5
	Power input	W	24	27	30
Heating ²	Capacity	kW	3.2	4	5
	Power input	W	24	27	30
Pipe connections	Liquid	mm	Φ6.35	Φ6.35	Φ6.35
	Gas	mm	Φ12.7	Φ12.7	Φ12.7
Net dimension (W×H×D)	mm	750×295×265	750×295×265	950×295×265	950×295×265
Packing dimension (W×H×D)	mm	875×385×360	875×385×360	1075×385×360	1075×385×360
Net/Gross weight	kg	10.8/14.7	10.8/14.7	12.4/16.3	12.4/16.3

Model			MIH71GHN18-A
Power supply	1phase, 220-240V,50/60Hz		
Cooling ¹	Capacity	kW	7.1
	Power input	W	50
Heating ²	Capacity	kW	8
	Power input	W	50
Pipe connections	Liquid	mm	Φ9.52
	Gas	mm	Φ15.9
Net dimension (W×H×D)	mm	1200×295×265	1200×295×265
Packing dimension (W×H×D)	mm	1315×385×360	1315×385×360
Net/Gross weight	kg	16.0/20.3	16.0/20.3

Notes:

1. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.

2. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.

3. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc.

Victorian Energy Upgrades (VEU) Program

The Victorian Energy Upgrades (VEU) program assists households and businesses to reduce their energy bills and greenhouse gas emissions by providing financial incentives to install energy efficient equipment and appliances.

Midea has a suite of high efficiency products to suit all upgrade categories which attract the highest incentives in each program. We are proudly introducing to our range the Mini VRF series, which thanks to our labs advanced technology, are more energy efficient systems that will be further reducing carbon emissions while increasing financial savings through the incentives to the Victorian community.

For more information on the program please visit following website

VIC <https://www.esc.vic.gov.au/victorian-energy-upgrades/about-victorian-energy-upgrades-program>

VEU Climatic Region	Heating capacity(kW)	Cooling capacity(kW)	VEECs(res)**
			2025*
For upgrades in Metropolitan Victoria-Climatic region mild	21	15.5	84
For upgrades in Metropolitan Victoria-Climatic region cold	21	15.5	92
For upgrades in Regional Victoria-Climatic region mild	21	15.5	84
For upgrades in Regional Victoria-Climatic region cold	21	15.5	92
For upgrades in Regional Victoria-Climatic region hot	21	15.5	50

*All certificates have been calculated for the dates between the 1st February of that year to January 31 of the following year.

*Residential VEECS certificates have been submitted to the VEU and waiting for final approval.

**VEEC data was calculated base on activity scenario 6 (VII) of activity 6 (23) -space heating and cooling-high efficiency air conditioner

Midea Air Conditioning Australia

Address: 1513 Dandenong Road Oakleigh VIC 3166 Australia

Email: info@mdhome.com.au

www.mdhome.com.au

Phone: 1300 726 002

Midea air conditioning Australia reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement. Midea is constantly developing and improving its products.

