



MIDEA HEATING AND COOLING

**MULTI SPLIT**



Midea, established in 1968 is a public company listed and since July 2016 a Fortune 500 company offering one of the most comprehensive ranges in the home appliances industry. Midea specializes in air treatment (residential and commercial solutions), refrigeration, laundry, cooking appliances, small kitchen appliances, water appliances, floor care and lighting.

## Midea is My True Blue Idea

Our objective is to deliver the best home solutions for every Australia family. Our home solutions are inspired by the ideas and needs of our Australian guests. Therefore, we created the slogan "Midea is My True Blue Idea".

## MD Appliances Pty Ltd

Founded in 2018 as MD Appliances Pty Ltd, we proudly represents Midea's Air conditioning products in Australia. Our mission is to bring Midea's world-class air conditioning solutions to the Australian market, ensuring that homes and commercial buildings alike benefit from cutting-edge technology, energy efficiency, and superior comfort.

more than  
\$53.08B USD  
of revenue in  
2024

serve  
customers in  
100+  
countries

40  
global  
production  
centers

190K+  
employees  
worldwide

global Fortune  
277  
company



**7 years parts and  
labor warranty**

For Hi-Wall/ Ducted/ Cassette/ VRF/  
Heat pump/ Window Box A/C



**5 years parts and  
labor warranty**

For Window Box A/C



**2 years parts and  
labor warranty**

For Heavy Commercial Products



**Local after sales  
service and support**

\* Source Euromonitor International (Shanghai) Limited; Consumer Appliances 23ed, retail volume sales in unit, 2022 data


# Our Technology:

## THE EXCLUSIVE INVERTER QUATTRO™ TECHNOLOGY



A brain that calculates your needs in any conditions

Midea's Genius Core Energy Chip with Precise-control Inverter Deduction Algorithm reduces energy loss by enabling more precise signal reception, accurate data processing, and prompt delivery of instructions to the compressor. As a result, Midea's inverter compressor offers more stable operation than common inverters. Its super-smooth inverter frequency of variation ensures you never notice fluctuations in room temperature.

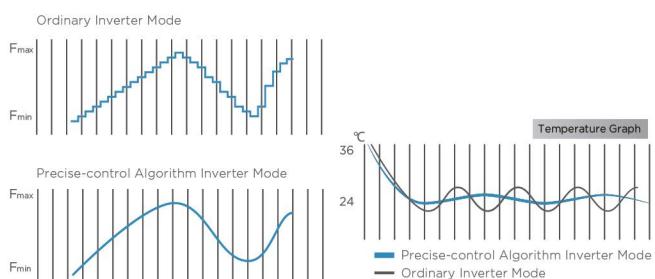

Up to 71%  
Ultra Energy Saving

Within  
 $\pm 0.5^{\circ}\text{C}$   
Comfort With  
Stable Temperature

65Hz in 6 seconds  
Flash Cooling/Heating

Superior operation from  
60 to -30°C  
High Ambient Cooling/Heating

## FULL DC INVERTER SYSTEM

Thanks to the Full DC Inverter System, Midea's air conditioners achieved 20% higher **energy efficiency compared to** normal AC inverters.

On top of the Midea's Full DC Inverter System, the Genius Core is an intelligent commander that keeping the harmony internally and externally.




Sine-wave  
DC inverter control



Rear-earth  
magnet motor




IPM DC  
Fan Motor

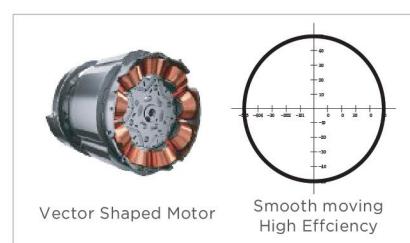

Vector Shaped Motor


Smooth moving  
High Efficency

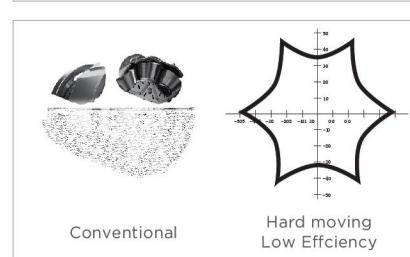

Conventional


Hard moving  
Low Efficency

# THE PERFECT MULTI ROOM SOLUTION

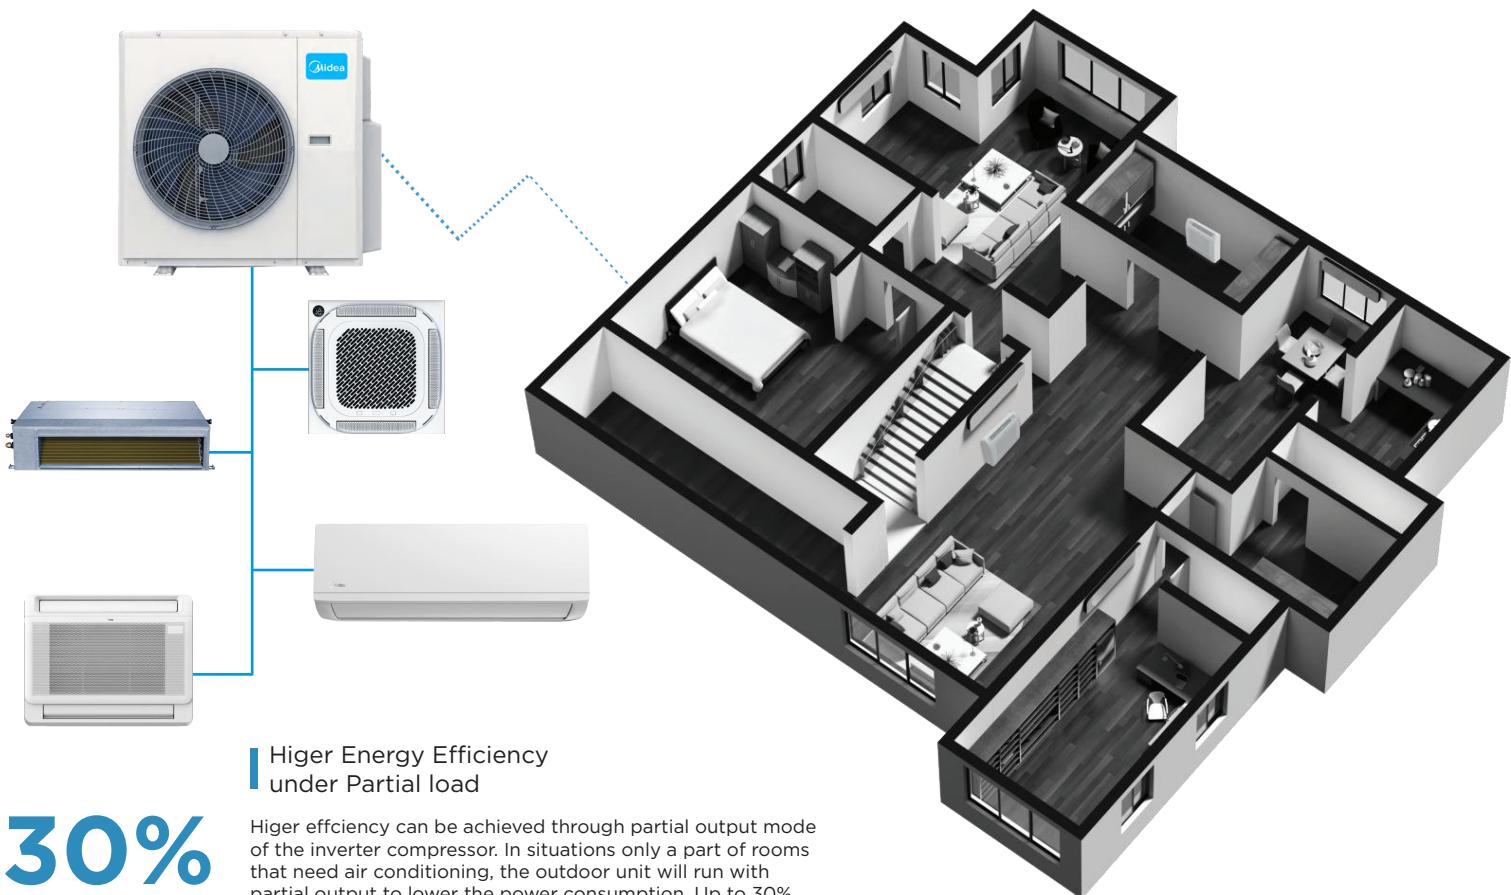

## Bionic Blower Wheel and Improved Air Duct

Based on natural models and bionic principles, Midea's fan blade design can effectively reduce airflow resistance and noise. Together with the optimized air duct, it delivers the same air flow volume with 30% less energy consumption.

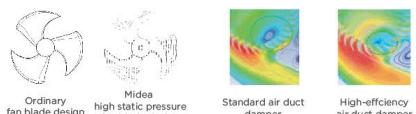

## V-PAM (Vector + I-PAM) Inverter Control

V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology. With this technology, further miniaturization, higher efficiency, and better performance are attained.



## CUSTOMISE CHOICE

Midea Inverter Multi Split Systems provide 4 indoor unit types—Wall Mounted, Ducted, Compact Cassettes, and Floor Console—offering endless combination possibilities. Pair up to 6 indoor units with an outdoor unit featuring capacities from 5kW to 18kW. With this wide range of unit types and capacities, Midea delivers a system tailored to meet virtually any need.

### Seamless & Sleek


Experience ultimate comfort with Midea's Wall Mounted Split Systems, designed for discreet yet powerful performance. The Turbo Function ensures rapid cooling and heating, while the optimized air tunnel design enhances airflow distribution. Control your system effortlessly from anywhere using the midea Mobile App via Wi-Fi, making it easy to adjust settings remotely.

### Space-Saving Design


Ideal for tight spaces, Midea's Ducted and Cassette indoor units maximize efficiency without compromising style. The Ducted unit operates quietly, hidden within bulkheads or ceiling cavities for a seamless look. Meanwhile, the low-profile Inverter Cassette delivers 360° airflow, perfect for open-plan living areas.

### Flexible & Functional

The Midea Floor Console ensures efficient heating and cooling with its dual-outlet design for fast temperature adjustments. Choose between wall-mounted or floor-standing installation to suit your space. Plus, enjoy convenient Wi-Fi control via the Android or Apple app, allowing remote temperature adjustments anytime, anywhere.

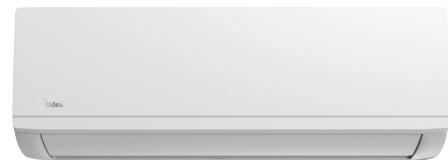


Wall Mounted Split System

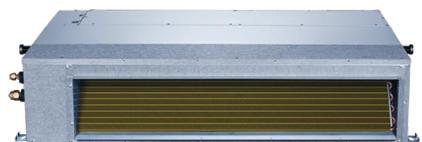

Celling Ducted



Celling Mounted Compact Cassette

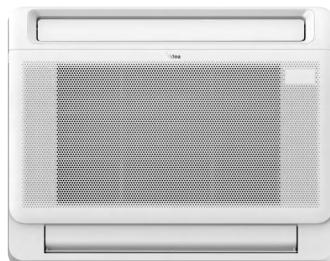

Floor Console


## FLEXIBLE INSTALLATION



**Midea Multi split system**

**Maximizing efficiency and comfort.**

Midea's innovative multi-split system allows one outdoor unit to connect with up to 6 indoor units, each with independent control. This flexible setup not only saves space but also reduces energy costs by letting you heat or cool only the rooms you need.

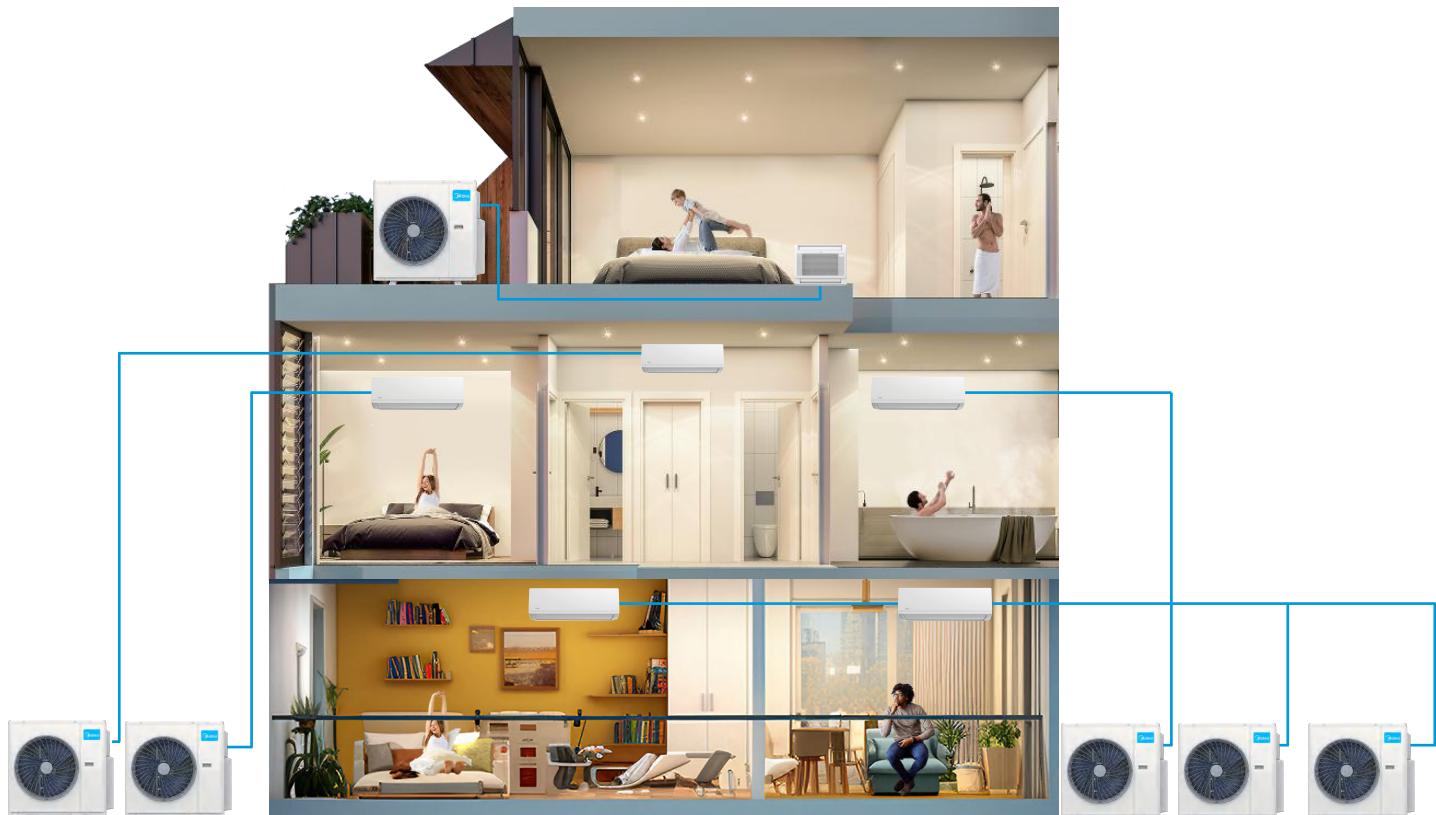

**Midea Single Split Systems**



# AUTOMATIC WIRING/PIPING CORRECTION

Midea multi-split unit helps the technicians to easily finish the wiring and piping. It saves great efforts by automatically correcting the connection and avoids any trial operations of every indoor unit after installation. The technicians press "check switch", wait for few minutes and the machine will begin to operate as expected.



MULTI-SPLIT UNIT - THE RIGHT AIR SOLUTION FOR MULTIPLE SPACE



# MULTI ODU



Multi ODU	Cooling Capacity (kW)	Heating Capacity (kW)	Max. IDU amounts
MULM10250B	5.25 (0.9 - 5.7)	5.5 (1.9 - 5.7)	Up to 2 units
MULM10371B	7.10 (3.22-8.79)	8.0 (2.05-8.79)	Up to 3 units
MULM10490B	9.15 (2.73-10.55)	9.6 (2.87-10.55)	Up to 4 units
MULM10513B	13.5 (2.63-14.65)	14.0 (2.63-15.24)	Up to 5 units
MULM10619B	19.0 (5.39-19.63)	21.5 (3.9-22.57)	Up to 6 units
MULM10620B	19.5 (4.66-20.02)	24.5 (7.56-24.50)	Up to 6 units

## WIRELESS CONTROLLER FEATURE LIST



\* Comes in the box for all split systems.  
 \* Optional for all cassettes and ducted systems.  
 (To use a wireless controller, a ducted system will require a wired controller as a signal receiver.)

Temperature range	16~30°C 62-86°F
Backlight	✓
Press Button	✓
ON/OFF	✓
Mode	✓
Temp Adjustment	✓
Fanspeed	✓
Turbo	✓
Follow Me	✓
Timer ON/OFF	✓
Child Lock	✓
Dry	✓
Setting Temp Limit	✓

# MULTI SPLIT OUTDOOR

Model Number			MULM10250B	MULM10371B	MULM10490B	
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50	
Cooling	Capacity (indoor+Outdoor)*	kW	5.25	7.1	9.15	
	Power Input (indoor+Outdoor)	kW	1.3	1.95	2.35	
	Rated current (Indoor+Outdoor)	A	6.81	8.68	10.6	
	AEER (Indoor+Outdoor)*	W/W	3.94	3.57	3.81	
	TCSPF (HOT/MIX/COLD)		6.514/5.609/5.737	5.977/5.169/5.302	6.503/5.578/5.756	
Heating	Capacity (Indoor+Outdoor)*	kW	5.5	8.0	9.6	
	Power input (indoor+Outdoor)*	kW	1.16	1.64	2.3	
	Rated current (indoor+Outdoor)*	A	6.65	7.5	10.3	
	ACOP (Indoor+Outdoor)	W/W	4.62	4.0	4.0	
	HPSF (HOT/MIX/COLD)		5.094/4.658/4.022	5.086/4.712/4.333	5.181/4.518/3.915	
Max.current		A	12	17.5	19.0	
Outdoor unit	Dimension(H*W*D)	mm	554x805x330	673x890x342	810x946x410	
	Packing(H*W*D)	mm	615x915x370	750x1030x438	885x1090x500	
	Net/Gross weight	Kg	34.6/37.7	48.1/51.6	61/66	
Refrigerant	Type		R32	R32	R32	
	Pre-charged length for all indoor to outdoor	m	20	30	40	
Refrigerant piping	Liquid side		2 x Ø6.35(2x1/4in)	3 x Ø6.35(3x1/4in)	4 x Ø6.35(4x1/4in)	
	Gas side		2 x Ø9.52(2x3/8in)	3 x Ø9.52(3x3/8in)	3xØ9.52+1xØ12.7(3x3/8in+1x1/2in)	
	Max. length for all rooms	m	40	60	80	
	Max.length for one indoor unit	m	25	30	35	
	Min. length for one indoor unit	m	6	9	12	
	Max. height difference(m)	OU to IU	15	15	15	
		IU to IU	10	10	10	
Model Number			MULM10513B	MULM10619B	MULM10620B	
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50	
Cooling	Capacity (indoor+Outdoor)*	kW	13.5	19.0	19.5	
	Power Input (indoor+Outdoor)	kW	3.73	5.58	5.86	
	Rated current (Indoor+Outdoor)	A	17.8	24.1	26.0	
	AEER (Indoor+Outdoor)*	W/W	3.56	3.42	3.28	
	TCSPF (HOT/MIX/COLD)		5.959/5.304/5.53	5.774/5.221/5.503	5.594/5.059/5.314	
Heating	Capacity (Indoor+Outdoor)*	kW	14.0	21.5	24.5	
	Power input (indoor+Outdoor)*	kW	3.15	5.1	6.64	
	Rated current (indoor+Outdoor)*	A	16.2	29.0	29.5	
	ACOP (Indoor+Outdoor)	W/W	4.35	4.15	3.64	
	HPSF (HOT/MIX/COLD)		5.545/4.8/4.312	5.372/4.509/3.748	5.124/4.238/3.609	
Max.current		A	30	33	38	
Outdoor unit	Dimension(H*W*D)	mm	975x980x415	1333x952x415	1580x1054x510	
	Packing(H*W*D)	mm	1080x1145x500	1480x1095x495	1740x1195x565	
	Net/Gross weight	Kg	91/106.4	110.6/124.9	137.4/160.6	
Refrigerant	Type		R32	R32	R32	
	Pre-charged length for all indoor to outdoor	m	50	60	90	
Refrigerant piping	Liquid side		5 x Ø6.35(5x1/4")	6 x Ø6.35(6x1/4in)	6 x Ø6.35 (1/4")	
	Gas side		3x Ø9.52+ 2 x Ø12.7(3x3/8" + 2 x 1/2")	4 x Ø9.52+2x Ø12.7 (4x3/8in+2x1/2in)	4 x Ø9.52 + 2 x Ø12.7 (4 x 3/8" + 2 x 1/2")	
	Max. length for all rooms	m	80	80	100	
	Max.length for one indoor unit	m	35	35	35	
	Min. length for one indoor unit	m	15	15	15	
	Max. height difference(m)	OU to IU	15	15	15	
		IU to IU	10	10	10	

# MULTI SPLIT HIGH WALLS



Venus

Model Number			MFAG20VB-N	MFAG26VB-N	MFAG35VB-N	MFAG50VB-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	2.05	2.5	3.5	5.0
Rated Heating	Capacity	kw	2.37	2.79	4.0	5.54
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	550/460/340/270/130	630/500/360/300/180	660/530/380/310/200	950/800/600/500/450
Indoor noise level/(Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	42.5/38/33/25/22	45.5/39/32/25/20	45/39.5/33/26/19.5	48.5/45.5/38/30.5/20
Indoor noise level(sound power)		dB(A)	52.9	57	59	60.5
Indoor unit	Dimension(H*W*D)	mm	292x729x200	295x802x200	295x802x200	321x971x228
	Packing(H*W*D)	mm	375x790x270	380x875x285	380x875x285	405x1045x305
	Net/Gross weight	Kg	7.9/10.2	8.6/11.1	8.5/11.1	11/14.6
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /12.7mm(1/2in)

Model Number			MFAG60VB-N	MFAG70VB-N	MFAG80VB-N	MFAG90VB-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	6.0	7.0	7.65	9.0
Rated Heating	Capacity	kw	6.5	7.5	8.2	9.5
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	950/800/600/500/450	1214/1053/683/504/492	1214/1053/683/504/492	1350/1110/760/560/350
Indoor noise level/(Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	48.5/45.5/38/30.5/20	52/50/41.5/27/21	52/50/41.5/27/21	54.5/52/45.5/34.5/22.5
Indoor noise level(sound power)		dB(A)	59.6	65.1	64.8	65.2
Indoor unit	Dimension(H*W*D)	mm	321x971x228	337x1082x234	337x1082x234	362x1259x283
	Packing(H*W*D)	mm	405x1045x305	315x1155x415	315x1155x415	385x1340x450
	Net/Gross weight	Kg	11/14.6	13.2/17.1	13.2/17.1	19.0/24.7
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)	9.52mm(3/8in) /15.9mm(5/8in)

# DUCTED CONNECTED



**MULMID07C**  
**MULMID09C**  
**MULMID12C**  
**MULMID18C**  
**DUCMI70IC**

Model Number			<b>MULMID07C</b>	<b>MULMID09C</b>	<b>MULMID12C</b>
Cooling	Capacity	kW	2.0	2.6	3.5
Heating	Capacity	kW	2.34	2.9	3.8
Indoor air flow		m³/h	620/540/450	620/540/450	660/570/470
External Static	Rated	Pa	25	25	25
Pressure	Range	Pa	0-100	0-100	0-100
Indoor noise level (Hi/Mi/Lo)		dB(A)	35/33/31/27	35/33/31/27	35/33/31/26
Indoor unit	Dimension (H*W*D)	mm	200x700x450	200x700x450	200x700x450
	Packing (H*W*D)	mm	285x860x540	285x860x540	285x860x540
	Net / Gross weight	Kg	16.6/19.8	16.6/19.8	16.6/19.8
Design pressure		MPa	4.3/1.7	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	2xØ6.35 / 2xØ9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")
Standard Thermostat type			Remote Control	Remote Control	Remote Control

Model Number			<b>MULMID18C</b>	<b>DUCMI70IC</b>
Cooling	Capacity	kW	5.28	7.3
Heating	Capacity	kW	6.0	7.5
Indoor air flow		m³/h	900/780/650	1500/1300/1000
External Static	Rated	Pa	25	25
Pressure	Range	Pa	0-160	0-160
Indoor noise level (Hi/Mi/Lo)		dB(A)	36.5/34/31/25	38/36/33/28
Indoor unit	Dimension (H*W*D)	mm	245x700x750	245x1000x750
	Packing (H*W*D)	mm	298x925x850	304x1225x860
	Net / Gross weight	Kg	24.4/29	31.5/36.9
Design pressure		MPa	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø12.7(1/4"/1/2")	Ø9.52 / Ø15.9(3/8"/5/8")
Standard Thermostat type			Remote Control	Wire Control

# COMPACT CASSETTE



MULMIC07C  
MULMIC09C  
MULMIC12C  
MULMIC18C

Model Number			MULMIC07C	MULMIC09C	MULMIC12C	MULMIC18C
Cooling	Capacity	kW	2.0	2.6	3.5	5.3
Heating	Capacity	kW	2.3	2.9	3.5	5.5
Indoor air flow		m³/h	500/460/400	500/460/400	620/520/330	660/540/300
Indoor noise level (Hi/Mi/Lo)		dB(A)	41.0/37.5/34.5	37.0/35.5/33.0	42/38.5/31.5	44/41/31.5
Indoor unit	Dimension (H*W*D)	mm	245x570x570	245x570x570	245x570x570	245x570x570
	Packing (H*W*D)	mm	295x715x640	295x715x640	295x715x640	295x715x640
	Net / Gross weight	Kg	16.1/18.8	16.1/18.8	16.1/18.8	16.2/19
Design pressure		MPa	4.2/1.5	4.2/1.5	4.2/1.5	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	2xØ6.35 / 2x Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø12.7(1/4"/1/2")
Standard Thermostat type			Remote control	Remote control	Remote control	Remote control

# FLOOR CONSOLE

MFCS50VA-N



Model Number			MFCS50VA-N
Power supply	Ph-V-Hz		220-240V-1Ph-50Hz
Rated Cooling	Capacity	kW	4.7
Rated Heating	Capacity	kW	5.2
Indoor air flow (Turbo/Hi/Mi/Lo/Silence)	L/s		255/229/202/176
Indoor noise level / (Turbo/Hi/Mi/Lo/Silence) (sound pressure)	dB(A)		42/39/29/25
Indoor unit	Dimension (H*W*D)	mm	621x794x200
	Packing (H*W*D)	mm	719x865x280
	Net / Gross weight	Kg	14.9/18.8
Refrigerant piping	Liquid side / Gas side	mm(inch)	6.35mm(1/4") / 12.7mm(1/2")
Operation temperature		°C	16-30
Room temperature	Indoor(cooling/heating)	°C	16-32/0-30
	Outdoor(cooling/heating)	°C	0-50/-30-24

# INDOOR UNITS COMBINATION

## DEFAULT RATIO

Model	MULMIO250B	MULMIO371B	MULMIO490B	MULMIO513B	MULMIO619B
Ratio	182%	183%	178%	149%	141%

## INDOOR UNITS COMBINATION MULMIO250B

One Unit (kW)	Two Unit (kW)			
3.5	2.0+2.0	2.0+5.0	2.6+3.5	3.5+3.5
5.3	2.0+2.6	2.0+6.0	2.6+5.0	3.5+5.0
/	2.0+3.5	2.6+2.6	2.6+6.0	3.5+6.0

## INDOOR UNITS COMBINATION MULMIO371B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)		
5.0	2.0+2.0	2.6+2.6	3.5+3.5	2.0+2.0+2.0	2.0+2.6+5.0	2.6+3.5+5.0
6.0	2.0+2.6	2.6+3.5	3.5+5.0	2.0+2.0+2.6	2.0+2.6+6.0	2.6+3.5+6.0
/	2.0+3.5	2.6+5.0	3.5+6.0	2.0+2.0+3.5	2.6+2.6+2.6	3.5+3.5+3.5
/	2.0+5.0	2.6+6.0	/	2.0+2.0+5.0	2.6+2.6+3.5	3.5+3.5+5.0
/	2.0+6.0	/	/	2.0+2.0+6.0	2.6+2.6+5.0	3.5+3.5+6.0
/	/	/	/	2.0+2.6+2.6	2.6+2.6+6.0	/
/	/	/	/	2.0+2.6+3.5	2.6+3.5+3.5	/

## INDOOR UNITS COMBINATION MULMIO490B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)					
7.0	2.0+2.0	2.6+2.6	3.5+3.5	5.0+5.0	2.0+2.0+2.0	2.0+2.6+2.6	2.0+3.5+5.0	2.6+3.5+5.0	/
8.0	2.0+2.6	2.6+3.5	3.5+5.0	5.0+6.0	2.0+2.0+2.6	2.0+2.6+3.5	2.0+3.5+6.0	2.6+3.5+6.0	/
/	2.0+3.5	2.6+5.0	3.5+6.0	6.0+6.0	2.0+2.0+3.5	2.0+2.6+5.0	2.6+2.6+2.6	3.5+3.5+3.5	/
/	2.0+5.0	2.6+6.0	3.5+7.0	/	2.0+2.0+5.0	2.0+2.6+6.0	2.6+2.6+3.5	3.5+3.5+5.0	/
/	2.0+6.0	2.6+7.0	3.5+8.0	/	2.0+2.0+6.0	2.0+2.6+7.0	2.6+2.6+5.0	3.5+3.5+6.0	/
/	2.0+7.0	2.6+8.0	/	/	2.0+2.0+7.0	2.0+2.6+8.0	2.6+2.6+6.0	/	/
/	2.0+8.0	/	/	/	2.0+2.0+8.0	2.0+3.5+3.5	2.6+3.5+3.5	/	/
Four Unit (kW)									
2.0+2.0+2.0+2.0		2.0+2.0+2.6+2.6		2.0+2.6+2.6+2.6		2.0+3.5+3.5+3.5		2.6+2.6+3.5+3.5	
2.0+2.0+2.0+2.6		2.0+2.0+2.6+3.5		2.0+2.6+2.6+3.5		2.0+3.5+3.5+5.0		2.6+2.6+3.5+5.0	
2.0+2.0+2.0+3.5		2.0+2.0+2.6+5.0		2.0+2.6+2.6+5.0		2.0+3.5+3.5+6.0		2.6+2.6+3.5+6.0	
2.0+2.0+2.0+5.0		2.0+2.0+2.6+6.0		2.0+2.6+2.6+6.0		2.6+2.6+2.6+2.6		2.6+3.5+3.5+3.5	
2.0+2.0+2.0+6.0		2.0+2.0+3.5+3.5		2.0+2.6+3.5+3.5		2.6+2.6+2.6+3.5		3.5+3.5+3.5+3.5	
2.0+2.0+2.0+7.0		2.0+2.0+3.5+5.0		2.0+2.6+3.5+5.0		2.6+2.6+2.6+5.0		/	
2.0+2.0+2.0+8.0		2.0+2.0+3.5+6.0		2.0+2.6+3.5+6.0		2.6+2.6+2.6+6.0		/	

## INDOOR UNITS COMBINATION MULMI0513B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)				
7.0	2.0+5.0	3.5+3.5	5.0+5.0	2.0+2.0+3.5	2.0+2.6+6.0	2.0+5.0+5.0	2.6+2.6+8.0	2.6+6.0+6.0
8.0	2.0+6.0	3.5+5.0	5.0+6.0	2.0+2.0+5.0	2.0+2.6+7.0	2.0+5.0+6.0	2.6+3.5+3.5	3.5+3.5+3.5
/	2.0+7.0	3.5+6.0	5.0+7.0	2.0+2.0+6.0	2.0+2.6+8.0	2.0+6.0+6.0	2.6+3.5+5.0	3.5+3.5+5.0
/	2.0+8.0	3.5+7.0	5.0+8.0	2.0+2.0+7.0	2.0+3.5+3.5	2.6+2.6+2.6	2.6+3.5+6.0	3.5+3.5+6.0
/	2.6+5.0	3.5+8.0	6.0+6.0	2.0+2.0+8.0	2.0+3.5+5.0	2.6+2.6+3.5	2.6+3.5+7.0	3.5+3.5+7.0
/	2.6+6.0	/	6.0+7.0	2.0+2.6+2.6	2.0+3.5+6.0	2.6+2.6+5.0	2.6+3.5+8.0	3.5+3.5+8.0
/	2.6+7.0	/	6.0+8.0	2.0+2.6+3.5	2.0+3.5+7.0	2.6+2.6+6.0	2.6+5.0+5.0	3.5+5.0+5.0
/	2.6+8.0	/	/	2.0+2.6+5.0	2.0+3.5+8.0	2.6+2.6+7.0	2.6+5.0+6.0	3.5+5.0+6.0
/	/	/	/	/	/	/	/	3.5+6.0+6.0
Four Unit (kW)								
2.0+2.0+2.0+2.0	2.0+2.0+2.6+5.0	2.0+2.0+5.0+5.0	2.0+2.6+3.5+5.0	2.0+2.6+5.0+5.0	2.6+2.6+5.0+6.0	3.5+3.5+3.5+7.0		
2.0+2.0+2.0+2.6	2.0+2.0+2.6+6.0	2.0+2.0+5.0+6.0	2.0+2.6+3.5+6.0	2.0+2.6+5.0+6.0	2.6+3.5+3.5+3.5	3.5+3.5+3.5+8.0		
2.0+2.0+2.0+3.5	2.0+2.0+2.6+7.0	2.0+2.6+2.6+2.6	2.0+2.6+3.5+7.0	2.6+2.6+2.6+8.0	2.6+3.5+3.5+5.0	2.0+3.5+3.5+3.5		
2.0+2.0+2.0+5.0	2.0+2.0+2.6+8.0	2.0+2.6+2.6+3.5	2.6+2.6+2.6+2.6	2.6+2.6+3.5+3.5	2.6+3.5+3.5+6.0	2.0+3.5+3.5+5.0		
2.0+2.0+2.0+6.0	2.0+2.0+3.5+3.5	2.0+2.6+2.6+5.0	2.6+2.6+2.6+3.5	2.6+2.6+3.5+5.0	2.6+3.5+3.5+7.0	2.0+3.5+3.5+6.0		
2.0+2.0+2.0+7.0	2.0+2.0+3.5+5.0	2.0+2.6+2.6+6.0	2.6+2.6+2.6+5.0	2.6+2.6+3.5+6.0	2.6+3.5+3.5+8.0	2.0+3.5+3.5+7.0		
2.0+2.0+2.0+8.0	2.0+2.0+3.5+6.0	2.0+2.6+2.6+7.0	2.6+2.6+2.6+6.0	2.6+2.6+3.5+7.0	3.5+3.5+3.5+3.5	2.0+3.5+3.5+8.0		
2.0+2.0+2.6+2.6	2.0+2.0+3.5+7.0	2.0+2.6+2.6+8.0	2.6+2.6+2.6+7.0	2.6+2.6+3.5+8.0	3.5+3.5+3.5+5.0	2.0+3.5+5.0+5.0		
2.0+2.0+2.6+3.5	2.0+2.0+3.5+8.0	2.0+2.6+3.5+3.5	2.0+2.6+3.5+8.0	2.6+2.6+5.0+5.0	3.5+3.5+3.5+6.0	2.0+3.5+5.0+6.0		
Five Unit (kW)								
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+3.5+3.5				
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.6+3.5+3.5	2.0+2.0+3.5+3.5+5.0				
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.6+3.5+5.0	2.0+2.0+3.5+3.5+6.0				
2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.6+3.5+6.0	2.0+2.0+3.5+3.5+7.0				
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.6+3.5+7.0	2.0+2.0+3.5+3.5+8.0				
2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+3.5+5.0	2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.6+3.5+8.0	2.0+2.0+3.5+5.0+5.0				
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.6+5.0+5.0	2.0+2.0+3.5+5.0+6.0				
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+3.5+7.0	2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.6+5.0+6.0	2.0+2.0+3.5+5.0+6.0				
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.6+6.0+6.0	2.0+2.0+3.5+6.0+6.0				
Five Unit (kW)								
2.0+2.6+2.6+2.6+3.5	2.0+2.6+2.6+6.0+6.0	2.6+2.6+2.6+2.6+2.6	2.6+2.6+2.6+5.0+6.0					
2.0+2.6+2.6+2.6+5.0	2.0+2.6+3.5+3.5+3.5	2.6+2.6+2.6+2.6+3.5	2.6+2.6+2.6+6.0+6.0					
2.0+2.6+2.6+2.6+6.0	2.0+2.6+3.5+3.5+5.0	2.6+2.6+2.6+2.6+5.0	2.6+2.6+2.6+3.5+3.5					
2.0+2.6+2.6+2.6+7.0	2.0+2.6+3.5+3.5+6.0	2.6+2.6+2.6+2.6+6.0	2.6+2.6+2.6+3.5+5.0					
2.0+2.6+2.6+2.6+8.0	2.0+2.6+3.5+3.5+7.0	2.6+2.6+2.6+2.6+7.0	2.6+2.6+2.6+3.5+6.0					
2.0+2.6+2.6+3.5+3.5	2.0+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+8.0	2.6+2.6+2.6+3.5+7.0					
2.0+2.6+2.6+3.5+5.0	2.0+2.6+3.5+5.0+5.0	2.6+2.6+2.6+3.5+3.5	2.6+2.6+2.6+3.5+5.0					
2.0+2.6+2.6+3.5+6.0	2.0+2.6+3.5+5.0+6.0	2.6+2.6+2.6+3.5+5.0	2.6+2.6+2.6+3.5+6.0					
2.0+2.6+2.6+3.5+7.0	2.0+2.6+3.5+5.0+7.0	2.6+2.6+2.6+3.5+6.0	2.6+3.5+3.5+3.5+3.5					
2.0+2.6+2.6+3.5+8.0	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+7.0	/					
2.0+2.6+2.6+5.0+5.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+8.0	/					
2.0+2.6+2.6+5.0+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+5.0+5.0	/					

## INDOOR UNITS COMBINATION MULMI0619B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)				
7.0	2.0+7.0	3.5+6.0	6.0+7.0	2.0+2.0+3.5	2.0+2.6+8.0	2.0+5.0+7.0	2.6+2.6+6.0	2.6+5.0+5.0
8.0	2.0+8.0	3.5+7.0	6.0+8.0	2.0+2.0+5.0	2.0+2.6+9.0	2.0+5.0+8.0	2.6+2.6+7.0	2.6+5.0+6.0
9.0	2.0+9.0	3.5+8.0	6.0+9.0	2.0+2.0+6.0	2.0+2.6+10.5	2.0+5.0+9.0	2.6+2.6+8.0	2.6+5.0+7.0
10.5	2.0+10.5	3.5+9.0	6.0+10.5	2.0+2.0+7.0	2.0+3.5+3.5	2.0+5.0+10.5	2.6+2.6+9.0	2.6+5.0+8.0
/	2.6+5.0	3.5+10.5	7.0+7.0	2.0+2.0+8.0	2.0+3.5+5.0	2.0+6.0+6.0	2.6+2.6+10.5	2.6+5.0+9.0
/	2.6+6.0	5.0+5.0	7.0+8.0	2.0+2.0+9.0	2.0+3.5+6.0	2.0+6.0+7.0	2.6+3.5+3.5	2.6+5.0+10.5
/	2.6+7.0	5.0+6.0	8.0+8.0	2.0+2.0+10.5	2.0+3.5+7.0	2.0+6.0+8.0	2.6+3.5+5.0	2.6+6.0+6.0
/	2.6+8.0	5.0+7.0	/	2.0+2.6+2.6	2.0+3.5+8.0	2.0+6.0+9.0	2.6+3.5+6.0	2.6+6.0+7.0
/	2.6+9.0	5.0+8.0	/	2.0+2.6+3.5	2.0+3.5+9.0	2.0+6.0+10.5	2.6+3.5+7.0	2.6+6.0+8.0
/	2.6+10.5	5.0+9.0	/	2.0+2.6+5.0	2.0+3.5+10.5	2.6+2.6+2.6	2.6+3.5+8.0	2.6+6.0+9.0
/	3.5+3.5	5.0+10.5	/	2.0+2.6+6.0	2.0+5.0+5.0	2.6+2.6+3.5	2.6+3.5+9.0	2.6+6.0+10.5
/	3.5+5.0	6.0+6.0	/	2.0+2.6+7.0	2.0+5.0+6.0	2.6+2.6+5.0	2.6+3.5+10.5	3.5+5.0+3.5

Three Unit (kW)							
3.5+6.0+6.0	3.5+6.0+9.0	5.0+5.0+6.0	5.0+5.0+9.0	5.0+6.0+7.0	6.0+6.0+7.0	6.0+6.0+10.5	
3.5+6.0+7.0	3.5+6.0+10.5	5.0+5.0+7.0	5.0+5.0+10.5	5.0+6.0+8.0	6.0+6.0+8.0	/	
3.5+6.0+8.0	5.0+5.0+5.0	5.0+5.0+8.0	5.0+6.0+6.0	6.0+6.0+6.0	6.0+6.0+9.0	/	
Four Unit (kW)							
2.0+2.0+2.0+2.0	2.0+2.0+3.5+7.0	2.0+2.6+2.6+8.0	2.0+2.6+6.0+10.5	2.0+5.0+5.0+6.0	2.6+2.6+5.0+6.0	2.6+3.5+3.5+3.5	3.5+3.5+3.5+7.0
2.0+2.0+2.0+2.6	2.0+2.0+3.5+8.0	2.0+2.6+2.6+9.0	2.0+3.5+3.5+3.5	2.0+5.0+5.0+7.0	2.6+2.6+5.0+7.0	2.6+3.5+3.5+5.0	3.5+3.5+3.5+8.0
2.0+2.0+2.0+3.5	2.0+2.0+3.5+9.0	2.0+2.6+2.6+10.5	2.0+3.5+3.5+5.0	2.0+5.0+5.0+8.0	2.6+2.6+5.0+8.0	2.6+3.5+3.5+6.0	3.5+3.5+3.5+9.0
2.0+2.0+2.0+5.0	2.0+2.0+3.5+10.5	2.0+2.6+3.5+3.5	2.0+3.5+3.5+6.0	2.0+5.0+6.0+6.0	2.6+2.6+5.0+9.0	2.6+3.5+3.5+7.0	3.5+3.5+3.5+10.5
2.0+2.0+2.0+6.0	2.0+2.0+5.0+5.0	2.0+2.6+3.5+5.0	2.0+3.5+3.5+7.0	2.0+5.0+6.0+7.0	2.6+2.6+5.0+10.5	2.6+3.5+3.5+8.0	3.5+3.5+5.0+5.0
2.0+2.0+2.0+7.0	2.0+2.0+5.0+6.0	2.0+2.6+3.5+6.0	2.0+3.5+3.5+8.0	2.0+6.0+6.0+6.0	2.6+2.6+6.0+6.0	2.6+3.5+3.5+9.0	3.5+3.5+5.0+6.0
2.0+2.0+2.0+8.0	2.0+2.0+5.0+7.0	2.0+2.6+3.5+7.0	2.0+3.5+3.5+9.0	2.0+6.0+6.0+7.0	2.6+2.6+6.0+7.0	2.6+3.5+3.5+10.5	3.5+3.5+5.0+7.0
2.0+2.0+2.0+9.0	2.0+2.0+5.0+8.0	2.0+2.6+3.5+8.0	2.0+3.5+3.5+10.5	2.0+6.0+6.0+8.0	2.6+2.6+6.0+8.0	2.6+3.5+5.0+5.0	3.5+3.5+5.0+8.0
2.0+2.0+2.0+10.5	2.0+2.0+5.0+9.0	2.0+2.6+3.5+9.0	2.0+3.5+5.0+5.0	2.6+2.6+2.6+2.6	2.6+2.6+6.0+9.0	2.6+3.5+5.0+6.0	3.5+3.5+6.0+6.0
2.0+2.0+2.6+2.6	2.0+2.0+5.0+10.5	2.0+2.6+3.5+10.5	2.0+3.5+5.0+6.0	2.6+2.6+3.5+3.5	2.6+2.6+6.0+10.5	2.6+3.5+5.0+7.0	3.5+3.5+6.0+7.0
2.0+2.0+2.6+3.5	2.0+2.0+6.0+6.0	2.0+2.6+5.0+5.0	2.0+3.5+5.0+7.0	2.6+2.6+3.5+5.0	2.6+2.6+2.6+3.5	2.6+3.5+5.0+8.0	3.5+3.5+6.0+8.0
2.0+2.0+2.6+5.0	2.0+2.0+6.0+7.0	2.0+2.6+5.0+6.0	2.0+3.5+5.0+8.0	2.6+2.6+3.5+6.0	2.6+2.6+2.6+5.0	2.6+3.5+6.0+6.0	3.5+5.0+5.0+5.0
2.0+2.0+2.6+6.0	2.0+2.0+6.0+8.0	2.0+2.6+5.0+7.0	2.0+3.5+5.0+9.0	2.6+2.6+3.5+7.0	2.6+2.6+2.6+6.0	2.6+3.5+6.0+7.0	3.5+5.0+5.0+6.0
2.0+2.0+2.6+7.0	2.0+2.0+6.0+9.0	2.0+2.6+5.0+8.0	2.0+3.5+5.0+10.5	2.6+2.6+3.5+8.0	2.6+2.6+2.6+7.0	2.6+3.5+6.0+8.0	3.5+5.0+5.0+7.0
2.0+2.0+2.6+8.0	2.0+2.0+6.0+10.5	2.0+2.6+5.0+9.0	2.0+3.5+6.0+6.0	2.6+2.6+3.5+6.0	2.6+2.6+2.6+3.5	2.6+5.0+5.0+5.0	3.5+5.0+5.0+8.0
2.0+2.0+2.6+9.0	2.0+2.6+6.0+2.6	2.0+2.6+5.0+10.5	2.0+3.5+6.0+7.0	2.6+2.6+3.5+7.0	2.6+2.6+2.6+5.0	2.6+5.0+5.0+6.0	3.5+5.0+6.0+6.0
2.0+2.0+2.6+10.5	2.0+2.6+6.0+3.5	2.0+2.6+6.0+6.0	2.0+3.5+6.0+8.0	2.6+2.6+3.5+8.0	2.6+2.6+2.6+6.0	2.6+5.0+6.0+7.0	3.5+5.0+6.0+7.0
2.0+2.0+3.5+3.5	2.0+2.6+6.0+5.0	2.0+2.6+6.0+7.0	2.0+3.5+6.0+9.0	2.6+2.6+3.5+9.0	2.6+2.6+2.6+7.0	2.6+6.0+6.0+6.0	3.5+5.0+6.0+8.0
2.0+2.0+3.5+5.0	2.0+2.6+6.0+6.0	2.0+2.6+6.0+8.0	2.0+3.5+6.0+10.5	2.6+2.6+3.5+10.5	2.6+2.6+2.6+8.0	3.5+3.5+3.5+3.5	3.5+6.0+6.0+6.0
2.0+2.0+3.5+6.0	2.0+2.6+6.0+7.0	2.0+2.6+6.0+9.0	2.0+5.0+5.0+5.0	2.6+2.6+5.0+5.0	2.6+2.6+2.6+9.0	3.5+3.5+3.5+5.0	3.5+6.0+6.0+7.0
/	/	/	/	/	/	2.6+2.6+2.6+10.5	3.5+3.5+3.5+6.0
Five Unit (kW)							
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+3.5+9.0	2.0+2.0+2.6+3.5+9.0	2.0+2.0+3.5+6.0+8.0	2.0+2.6+2.6+3.5+10.5	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+7.0	2.6+2.6+5.0+5.0+6.0
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+3.5+10.5	2.0+2.0+2.6+3.5+10.5	2.0+2.0+5.0+5.0+5.0	2.0+2.6+2.6+5.0+5.0	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+8.0	2.6+2.6+5.0+6.0+6.0
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+5.0+5.0	2.0+2.0+2.6+5.0+5.0	2.0+2.0+5.0+5.0+6.0	2.0+2.6+2.6+5.0+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+5.0+5.0	2.6+2.6+6.0+6.0+6.0
2.0+2.0+2.0+2.0+5.0	2.0+2.0+2.0+5.0+6.0	2.0+2.0+2.6+5.0+6.0	2.0+2.0+5.0+5.0+7.0	2.0+2.6+2.6+5.0+7.0	2.0+3.5+3.5+3.5+7.0	2.6+2.6+2.6+5.0+6.0	2.6+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+5.0+7.0	2.0+2.0+2.6+5.0+7.0	2.0+2.0+5.0+5.0+8.0	2.0+2.6+2.6+5.0+8.0	2.0+3.5+3.5+3.5+8.0	2.6+2.6+2.6+5.0+7.0	2.6+3.5+3.5+3.5+5.0
2.0+2.0+2.0+2.0+7.0	2.0+2.0+2.0+5.0+8.0	2.0+2.0+2.6+5.0+8.0	2.0+2.0+5.0+5.0+9.0	2.0+2.6+2.6+5.0+9.0	2.0+3.5+3.5+3.5+9.0	2.6+2.6+2.6+5.0+8.0	2.6+3.5+3.5+3.5+7.0
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+5.0+9.0	2.0+2.0+2.6+5.0+9.0	2.0+2.0+5.0+5.0+10.5	2.0+2.6+2.6+5.0+10.5	2.0+3.5+3.5+3.5+10.5	2.6+2.6+2.6+5.0+9.0	2.6+3.5+3.5+3.5+8.0
2.0+2.0+2.0+2.0+9.0	2.0+2.0+2.0+6.0+10.5	2.0+2.0+2.6+6.0+10.5	2.0+2.0+6.0+6.0+10.5	2.0+2.6+2.6+6.0+10.5	2.0+3.5+3.5+3.5+10.5	2.6+2.6+2.6+6.0+10.5	2.6+3.5+3.5+3.5+9.0
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.6+2.6+2.6	2.0+2.0+3.5+3.5+3.5	2.0+2.6+2.6+2.6+3.5	2.0+3.5+3.5+3.5+5.0	2.6+2.6+2.6+3.5+3.5	2.6+3.5+3.5+3.5+6.0
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.6+2.6+3.5	2.0+2.0+3.5+3.5+5.0	2.0+2.6+2.6+2.6+5.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+3.5+5.0	2.6+3.5+3.5+3.5+7.0
2.0+2.0+2.0+2.6+5.0	2.0+2.0+2.6+2.6+5.0	2.0+2.0+2.6+2.6+5.0	2.0+2.0+3.5+3.5+6.0	2.0+2.6+2.6+2.6+6.0	2.0+3.5+3.5+3.5+7.0	2.6+2.6+2.6+3.5+6.0	2.6+3.5+3.5+3.5+8.0
2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+3.5+3.5+7.0	2.0+2.6+2.6+2.6+7.0	2.0+3.5+3.5+3.5+8.0	2.6+2.6+2.6+3.5+7.0	2.6+3.5+3.5+3.5+8.0
2.0+2.0+2.0+2.6+7.0	2.0+2.0+2.6+2.6+7.0	2.0+2.0+2.6+2.6+7.0	2.0+2.0+3.5+3.5+8.0	2.0+2.6+2.6+2.6+8.0	2.0+3.5+3.5+3.5+9.0	2.6+2.6+2.6+3.5+8.0	2.6+3.5+3.5+3.5+9.0
2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.6+2.6+8.0	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+3.5+9.0	2.0+2.6+2.6+2.6+9.0	2.0+3.5+3.5+3.5+10.0	2.6+2.6+2.6+3.5+9.0	2.6+3.5+3.5+3.5+10.0
2.0+2.0+2.0+2.6+9.0	2.0+2.0+2.6+2.6+9.0	2.0+2.0+2.6+2.6+9.0	2.0+2.0+3.5+3.5+10.0	2.0+2.6+2.6+2.6+10.0	2.0+3.5+3.5+3.5+10.0	2.6+2.6+2.6+3.5+10.0	2.6+3.5+3.5+3.5+10.0
2.0+2.0+2.0+2.6+10.5	2.0+2.0+2.6+2.6+10.5	2.0+2.0+2.6+2.6+10.5	2.0+2.0+3.5+3.5+10.5	2.0+2.6+2.6+2.6+10.5	2.0+3.5+3.5+3.5+10.5	2.6+2.6+2.6+3.5+10.5	2.6+3.5+3.5+3.5+10.5
2.0+2.0+2.0+2.6+11.5	2.0+2.0+2.6+2.6+11.5	2.0+2.0+2.6+2.6+11.5	2.0+2.0+3.5+3.5+11.5	2.0+2.6+2.6+2.6+11.5	2.0+3.5+3.5+3.5+11.5	2.6+2.6+2.6+3.5+11.5	2.6+3.5+3.5+3.5+11.5
2.0+2.0+2.0+2.6+12.5	2.0+2.0+2.6+2.6+12.5	2.0+2.0+2.6+2.6+12.5	2.0+2.0+3.5+3.5+12.5	2.0+2.6+2.6+2.6+12.5	2.0+3.5+3.5+3.5+12.5	2.6+2.6+2.6+3.5+12.5	2.6+3.5+3.5+3.5+12.5
2.0+2.0+2.0+2.6+13.5	2.0+2.0+2.6+2.6+13.5	2.0+2.0+2.6+2.6+13.5	2.0+2.0+3.5+3.5+13.5	2.0+2.6+2.6+2.6+13.5	2.0+3.5+3.5+3.5+13.5	2.6+2.6+2.6+3.5+13.5	2.6+3.5+3.5+3.5+13.5
2.0+2.0+2.0+2.6+14.5	2.0+2.0+2.6+2.6+14.5	2.0+2.0+2.6+2.6+14.5	2.0+2.0+3.5+3.5+14.5	2.0+2.6+2.6+2.6+14.5	2.0+3.5+3.5+3.5+14.5	2.6+2.6+2.6+3.5+14.5	2.6+3.5+3.5+3.5+14.5
2.0+2.0+2.0+2.6+15.5	2.0+2.0+2.6+2.6+15.5	2.0+2.0+2.6+2.6+15.5	2.0+2.0+3.5+3.5+15.5	2.0+2.6+2.6+2.6+15.5	2.0+3.5+3.5+3.5+15.5	2.6+2.6+2.6+3.5+15.5	2.6+3.5+3.5+3.5+15.5
2.0+2.0+2.0+2.6+16.5	2.0+2.0+2.6+2.6+16.5	2.0+2.0+2.6+2.6+16.5	2.0+2.0+3.5+3.5+16.5	2.0+2.6+2.6+2.6+16.5	2.0+3.5+3.5+3.5+16.5	2.6+2.6+2.6+3.5+16.5	2.6+3.5+3.5+3.5+16.5
2.0+2.0+2.0+2.6+17.5	2.0+2.0+2.6+2.6+17.5	2.0+2.0+2.6+2.6+17.5	2.0+2.0+3.5+3.5+17.5	2.0+2.6+2.6+2.6+17.5	2.0+3.5+3.5+3.5+17.5	2.6+2.6+2.6+3.5+17.5	2.6+3.5+3.5+3.5+17.5
2.0+2.0+2.0+2.6+18.5	2.0+2.0+2.6+2.6+18.5	2.0+2.0+2.6+2.6+18.5	2.0+2.0+3.5+3.5+18.5	2.0+2.6+2.6+2.6+18.5	2.0+3.5+3.5+3.5+18.5	2.6+2.6+2.6+3.5+18.5	2.6+3.5+3.5+3.5+18.5
2.0+2.0+2.0+2.6+19.5	2.0+2.0+2.6+2.6+19.5	2.0+2.0+2.6+2.6+19.5	2.0+2.0+3.5+3.5+19.5	2.0+2.6+2.6+2.6+19.5	2.0+3.5+3.5+3.5+19.5	2.6+2.6+2.6+3.5+19.5	2.6+3.5+3.5+3.5+19.5
2.0+2.0+2.0+2.6+20.5	2.0+2.0+2.6+2.6+20.5	2.0+2.0+2.6+2.6+20.5	2.0+2.0+3.5+3.5+20.5	2.0+2.6+2.6+2.6+20.5	2.0+3.5+3.5+3.5+20.5	2.6+2.6+2.6+3.5+20.5	2.6+3.5+3.5+3.5+20.5
2.0+2.0+2.0+2.6+21.5	2.0+2.0+2.6+2.6+21.5	2.0+2.0+2.6+2.6+21.5	2.0+2.0+3.5+3.5+21.5	2.0+2.6+2.6+2.6+21.5	2.0+3.5+3.5+3.5+21.5	2.6+2.6+2.6+3.5+21.5	2.6+3.5+3.5+3.5+21.5
2.0+2.0+2.0+2.6+22.5	2.0+2.0+2.6+2.6+22.5	2.0+2.0+2.6+2.6+22.5	2.0+2.0+3.5+3.5+22.5	2.0+2.6+2.6+2.6+22.5	2.0+3.5+3.5+3.5+22.5	2.6+2.6+2.6+3.5+22.5	2.6+3.5+3.5+3.5+22.5
2.0+2.0+2.0+2.6+23.5	2.0+2.0+2.6+2.6+23.5	2.0+2.0+2.6+2.6+23.5	2.0+2.0+3.5+3.5+23.5	2.0+2.6+2.6+2.6+23.5	2.0+3.5+3.5+3.5+23.5	2.6+2.6+2.6+3.5+23.5	2.6+3.5+3.5+3.5+23.5
2.0+2.0+2.0+2.6+24.5	2.0+2.0+2.6+2.6+24.5	2.0+2.0+2.6+2.6+24.5	2.0+2.0+3.5+3.5+24.5	2.0+2.6+2.6+2.6+24.5	2.0+3.5+3.5+3.5+24.5	2.6+2.6+2.6+3.5+24.5	2.6+3.5+3.5+3.5+24.5
2.0+2.0+2.0+2.6+25.5	2.0+2.0+2.6+2.6+25.5	2.0+2.0+2.6+2.6+25.5	2.0+2.0+3.5+3.5+25.5	2.0+2.6+2.6+2.6+25.5	2.0+3.5+3.5+3.5+25.5	2.6+2.6+2.6+3.5+25.5	2.6+3.5+3.5+3.5+25.5
2.0+2.0+2.0+2.6+26.5	2.0+2.0+2.6+2.6+26.5	2.0+2.0+2.6+2.6+26.5	2.0+2.0+3.5+3.5+26.5	2.0+2.6+2.6+2.6+26.5	2.0+3.5+3.5+3.5+26.5	2.6+2.6+2.6+3.5+26.5	2.6+3.5+3.5+3.5+26.5
2.0+2.0+2.0+2.6+27.5	2.0+2.0+2.6+2.6+27.5	2.0+2.0+2.6+2.6+27.5	2.0+2.0+3.5+3.5+27.5	2.0+2.6+2.6+2.6+27.5	2.0+3.5+3.5+3.5+27.5	2.6+2.6+2.6+3.5+27.5	2.6+3.5+3.5+3.5+27.5
2.0+2.0+2.0+2.6+28.5	2.0+2.0+2.6+2.6+28.5	2.0+2.0+2.6+2.6+28.5	2.0+2.0+3.5+3.5+28.5	2.0+2.6+2.6+2.6+28.5	2.0+3.5+3.5+3.5+28.5	2.6+2.6+2.6+3	

# World's No.1 Residential Inverter Air Conditioning Company

## World's No.1 Air Treatment Brand For 4 Consecutive Years



1. Date source: Euromonitor International (Shanghai) Ltd., measured in terms of the company's production volume of its brands' residential inverter air conditioners and in terms of the company's total production volume of residential inverter air conditioners (including OEM brands) in 2022 and 2023, respectively, based on research completed in Aug 2023 and Aug 2024. Inverter air conditioners refer to air conditioners installed with variable-speed drives.
2. Data source: Euromonitor International (Shanghai) Limited; Consumer Appliances 25ed, retail volume sales in units, 2020 to 2024 data.