

E-BOOST HOT WATER HEAT PUMP ALL IN ONE SYSTEM



LOW-COST HEAT PUMP WATER HEATER TO MINIMIZE ENVIRONMENTAL IMPACT & MAXIMIZE ENERGY EFFICIENCY

Save up to **77%** ⁽²⁾ **13** ⁽³⁾ Tonnes CO₂e compared to conventional electric water heater

Save up to **7** ⁽⁴⁾ Tonnes CO₂e compared to conventional gas water heater

POWERFUL FEATURES

- Error code
- Easy-to-access E-Box
- R290 application
- Eligible for government incentives
- Light weight design
- Low operating noise
- Power outage memory
- Wi-Fi enable
- Solar PV ready
- Energy-Efficient heat pump technology

RELIABLE PROTECTION


- Wider operating range between -20°C & 47°C
- Built in Frost Protection
- Auto & Manual disinfection

HOW DOES MIDEA SMART SAVER WORK?

Step 1: A fan draws in air, containing heat energy, across the evaporator. The evaporator turns the liquid refrigerant into a gas.


Step 2: The compressor pressurises the refrigerant into a hot gas.

Step 3: The hot gas inside the condenser coil heats the water inside the coil-wrapped tank. The refrigerant reverts back to a liquid after heating the water and continues to the evaporator for the process to start again.

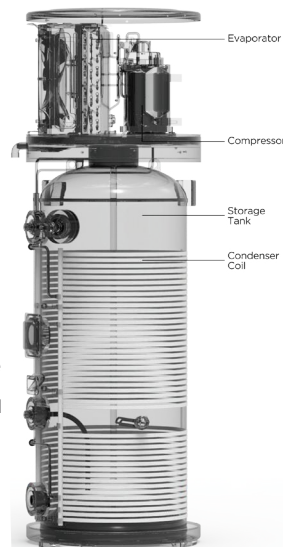


Smart Heat Pump Technology With 400% Remarkable Efficiency

From 1 kW of power input, Midea Smart Saver can create over 4 kW's of output heat. That's a performance efficiency of a remarkable 400%. Where as conventional electric storage water heaters can only convert 1 kW of input power into a maximum of 1 kW of output heat.



Powered By One Of The Most Environmental Refrigerant



SPECIFICATION



Sale Model	RSJ-23/300RDN7-L2-C	RSJ-23/300RDN7-L2-D
Storage size (L)	280	280
Runining ambient temp - HP only (°C)	-7 - 43	-7 - 43
Runining ambient temp - HP & E-Heater (°C)	-20 - 45	-20 - 45
Out water Temp. (°C)	Default 65°C, 55°C-70°C	Default 65°C, 55°C-70°C
Power supply (Ph / V / Hz)	1 / 220-240 / 50	1 / 220-240 / 50
Capacity - HP Only (kW)	2.5	2.5
COP (kW/kW)	4.6	4.6
Max. current (A)	18.3	20.7
Dimension (DxH) (mm)	650 x 650 x 1962	650 x 650 x 1962
Net/gross weight (kg)	138 / 170	140 / 172
Sound pressure level (dB(A))	48	48
Refrigerant type/quantity (kg)	R290 / 0.42	R290 / 0.42
System protection	TCO, PTR vaive, automatic defrosting, over-load protector, high-pressure protecor	TCO, PTR vaive, automatic defrosting, over-load protector, high-pressure protecor
Air flow (L/S)	222	222
Water inlet pipe (mm)	DN20	DN20
Water outlet pipe (mm)	DN20	DN20
Drainage pipe (mm)	DN20	DN20
PT valve joint (mm)	DN15	DN15
Max. pressure (kPa)	850	850
E-heater (kW)	3.25	4.1

VEECs 2026	Activity	VEEC 1D Metro		VEEC 1D Regional		VEEC 1D Metro		VEEC 1D Regional	
		Zone 4	Zone 5	Zone 4	Zone 5	Zone 4	Zone 5	Zone 4	Zone 5
	RSJ-23/300RDN7-L2-C	8	8	8	8	8	8	8	8
RSJ-23/300RDN7-L2-D	8	8	8	8	8	8	8	8	
Activity	ESC D17 Metro		ESC D17 Regional		ESC D19 Metro		ESC D19 Regional		
	Zone 3	Zone 5	Zone 3	Zone 5	Zone 3	Zone 5	Zone 3	Zone 5	
	RSJ-23/300RDN7-L2-C	29	31	30	32	15	16	15	16
RSJ-23/300RDN7-L2-D	26	28	27	29	12	13	12	12	

STC 2026	Activity	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
		RSJ-23/300RDN7-L2-C	12	12	15	16
	RSJ-23/300RDN7-L2-D	13	13	16	17	17

* STC: Valid until 01.01.2026 to 31.12.2026

* Product approval by VEU, CER and IPART

* Terms & conditions apply - contact us for more details

* 1D: HPWH replacing electric water heater; 3C: HPWH replacing gas water heater
D17: HPWH replacing electric water heater; D19:HPWH replacing gas water heater

Midea HVAC & Energy Australia

MD00210526

Address: 1513 Dandenong Road, Oakleigh 3166 VIC Australia

Email: info@mdhome.com.au

www.mdhome.com.au

Phone: 1300 726 002

Midea HVAC & Energy Australia reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement. Midea is constantly developing and improving its products.